


CHANGES: Added R84. Removed R70, R92. Editorial.

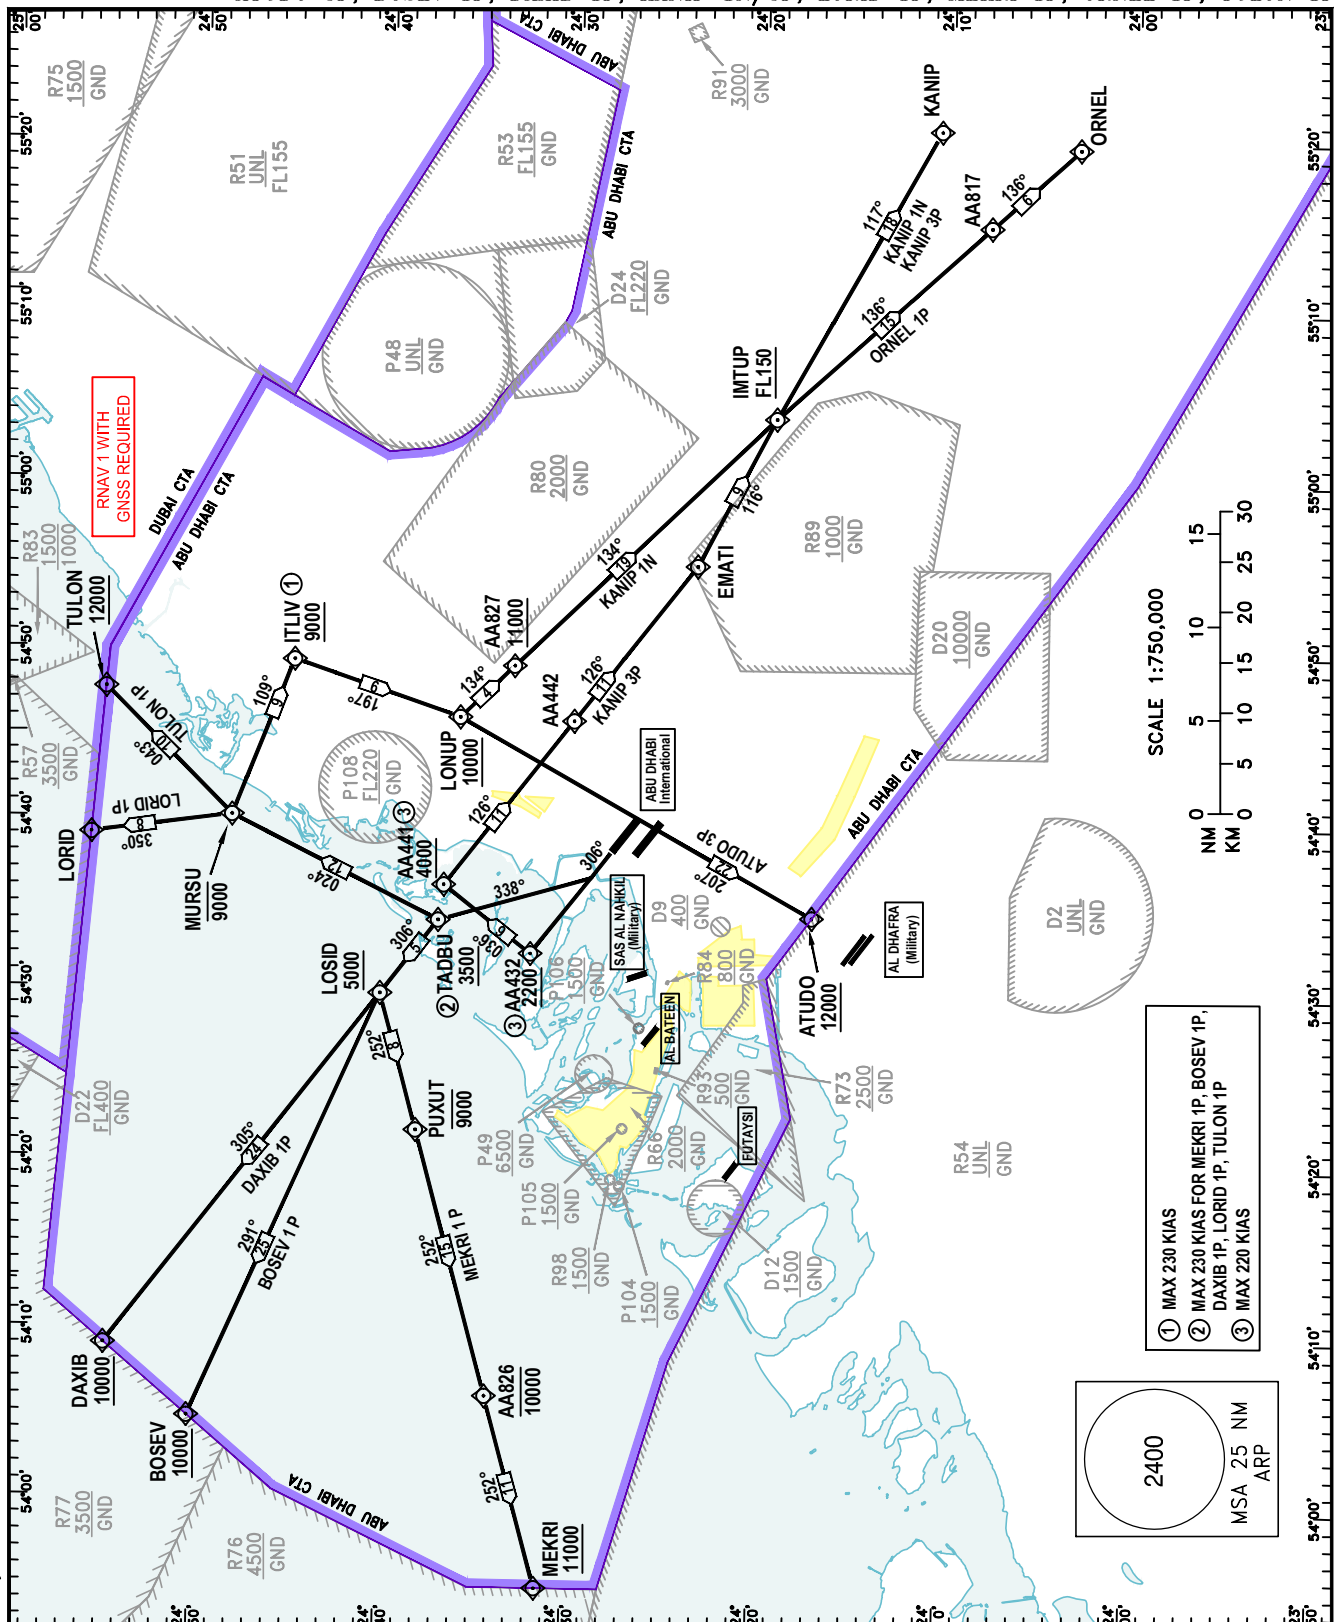

ATIS	119.675
ABU DHABI RADAR (W)	128.100
ABU DHABI RADAR (C)	124.400
ABU DHABI DIRECTOR (S)	118.000
ABU DHABI DIRECTOR (N)	118.425
ABU DHABI RADAR (E)	133.550
ABU DHABI INFO	127.500
TWR	119.200(S)
	118.675(N)
GND	123.975(S)
	121.950(N)

FOR ROUTE DESCRIPTION


SEE OMAA AD 2.22

TRANSITION ALTITUDE
13,000 FT

MAGNETIC

BEARINGS ARE MAGNETIC
ELEV., ALT., HGT IN FEET

Refer ENR 5.1 for vertical limits details



NOTES

**Do not climb above ATC
cleared level.**

RESTRICTIONS

On DEP climb to 4000 FT
only. Further climb when
instructed by Abu Dhabi
RADARMNM required climb
gradient 5% to 8,000 FT
(300 FT per NM)MAX 250 KIAS below
10,000 FTDEP ACFT shall CTC
ABU DHABI RADAR (W)
on 128.100 MHz as
soon as possible APSPG
1000 FT unless
otherwise instructed by
ABU DHABI TWR.