
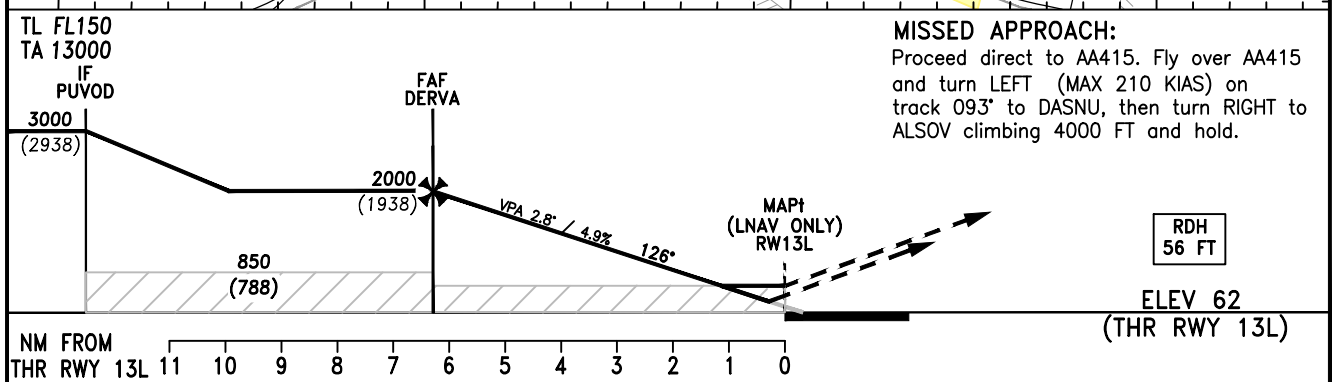


INSTRUMENT AERODROME ELEV 83 FT
APPROACH HEIGHTS RELATED TO
CHART-ICAO THR RWY 13L ELEV 62 FT

ABU DHABI RADAR (W)	128.100	ABU DHABI RADAR (E)	133.550
ABU DHABI RADAR (C)	124.400	ABU DHABI INFO	127.500
ABU DHABI DIRECTOR (S)	118.000	TWR	119.200(S) 118.675(N) 123.975(S) 121.950(N)
ABU DHABI DIRECTOR (N)	118.425	GND	

ABU DHABI/Intl.
RNP Z RWY 13L
CAT A-D_L

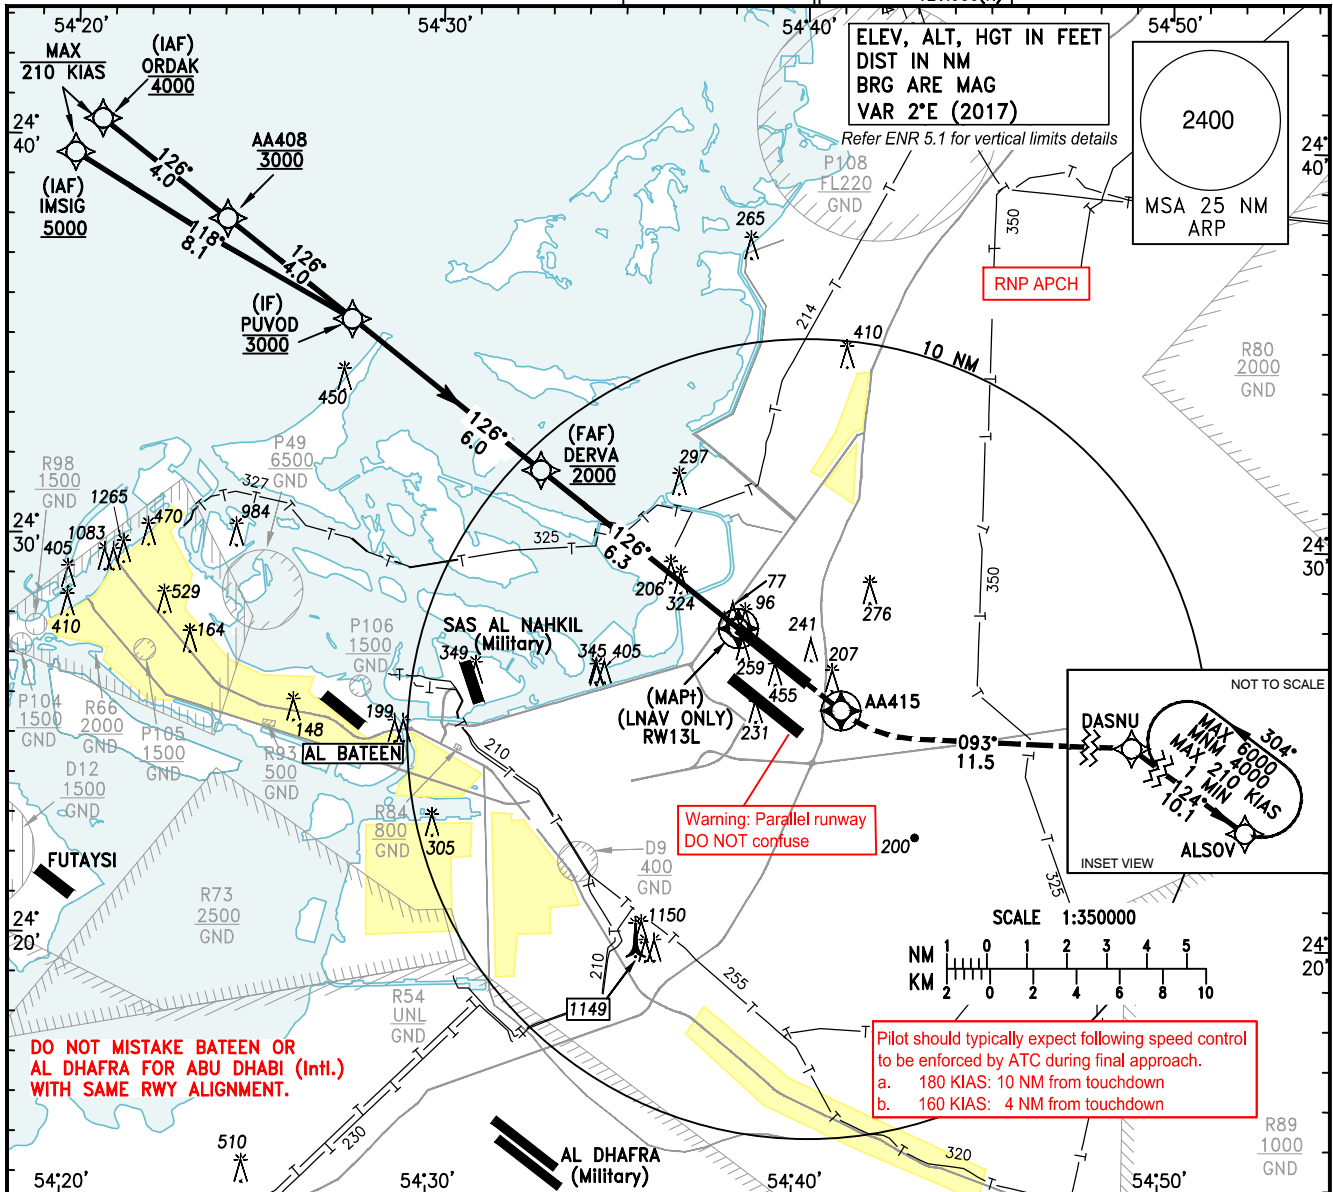

OCA/(H)		A	B	C	D	D _L	NOTE 1. For uncompensated Baro-VNAV systems procedure not authorized below 0°C or above 69°C.				
Straight-in Approach	LNAV/VNAV	350 (288)	360 (298)	380 (318)	410 (348)	410 (348)					
	LNAV	510 (448)									
Circling		N/A									
				Distance from RW13L	NM	1	2	3	4	5	6
				Altitude	FT	415	712	1009	1306	1604	1901
				Ground Speed	KTS	80	100	120	140	160	180
				Rate of Descent (2.8°)	FT/MIN	400	495	595	690	790	890