

INSTRUMENT AERODROME ELEV 83 FT
APPROACH HEIGHTS RELATED TO
CHART-ICAO THR RWY 13R ELEV 78 FT


ABU DHABI
RADAR (W)
ABU DHABI
RADAR (C)
ABU DHABI
DIRECTOR (S)
ABU DHABI
DIRECTOR (N)

128.100
124.400
118.000
118.425

ABU DHABI
RADAR (E)
ABU DHABI
INFO
TWR
GND

133.550
127.500
119.200(S)
118.675(N)
123.975(S)
121.950(N)

ABU DHABI/Intl.
RNAV(GNSS) Z RWY13R
CAT A-DL

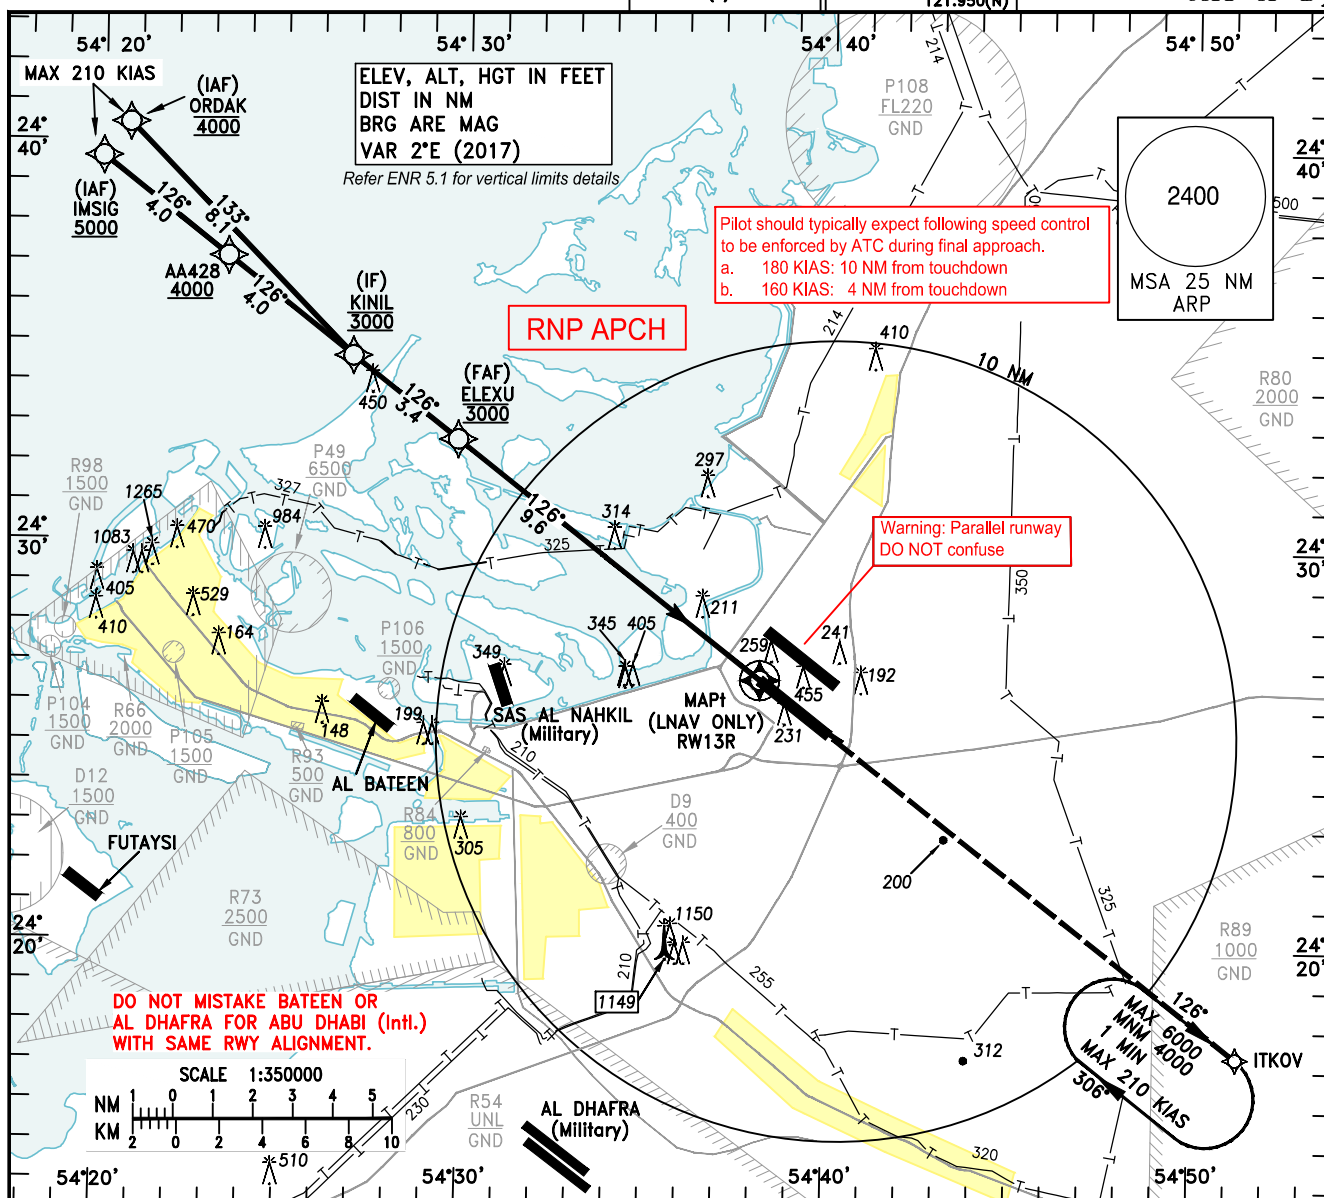

TL FL150 TA 13000		MISSED APPROACH: Proceed direct to ITKOV climbing to 4000 FT and hold.																																		
IF KINIL FAF ELEXU		3000 (2922) 3000 (2922) 950 (867) VPA 2.8° / 4.9 % 126° MAPt (LNAV ONLY) RWY13R RDH 56 FT ELEV 78 (THR RWY 13R)																																		
NM FROM THR RWY 13R		13	12	11	10	9	8	7	6	5	4	3	2	1	0																					
OCA/(H)		A					B					C					D					D _L					NOTE 1. For uncompensated Baro-VNAV systems procedure not authorized below 0°C or above 69°C.									
Straight-in Approach	LNAV/VNAV	420 (342)					430 (352)					450 (372)					480 (402)					480 (402)														
	LNAV	600 (517)																																		
Circling		N/A																																		
		Distance from RWY13R		NM		1		2		3		4		5		6																				
		Altitude		FT		432		729		1026		1323		1621		1918																				
		Ground Speed		KTS		80		100		120		140		160		180																				
		Rate of Descent (2.8°)		FT/MIN		400		495		595		690		790		890																				