ARP 245506N 0551032E	AD ELEV 171 FT

ELEVATIONS IN FEET AMSL
DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

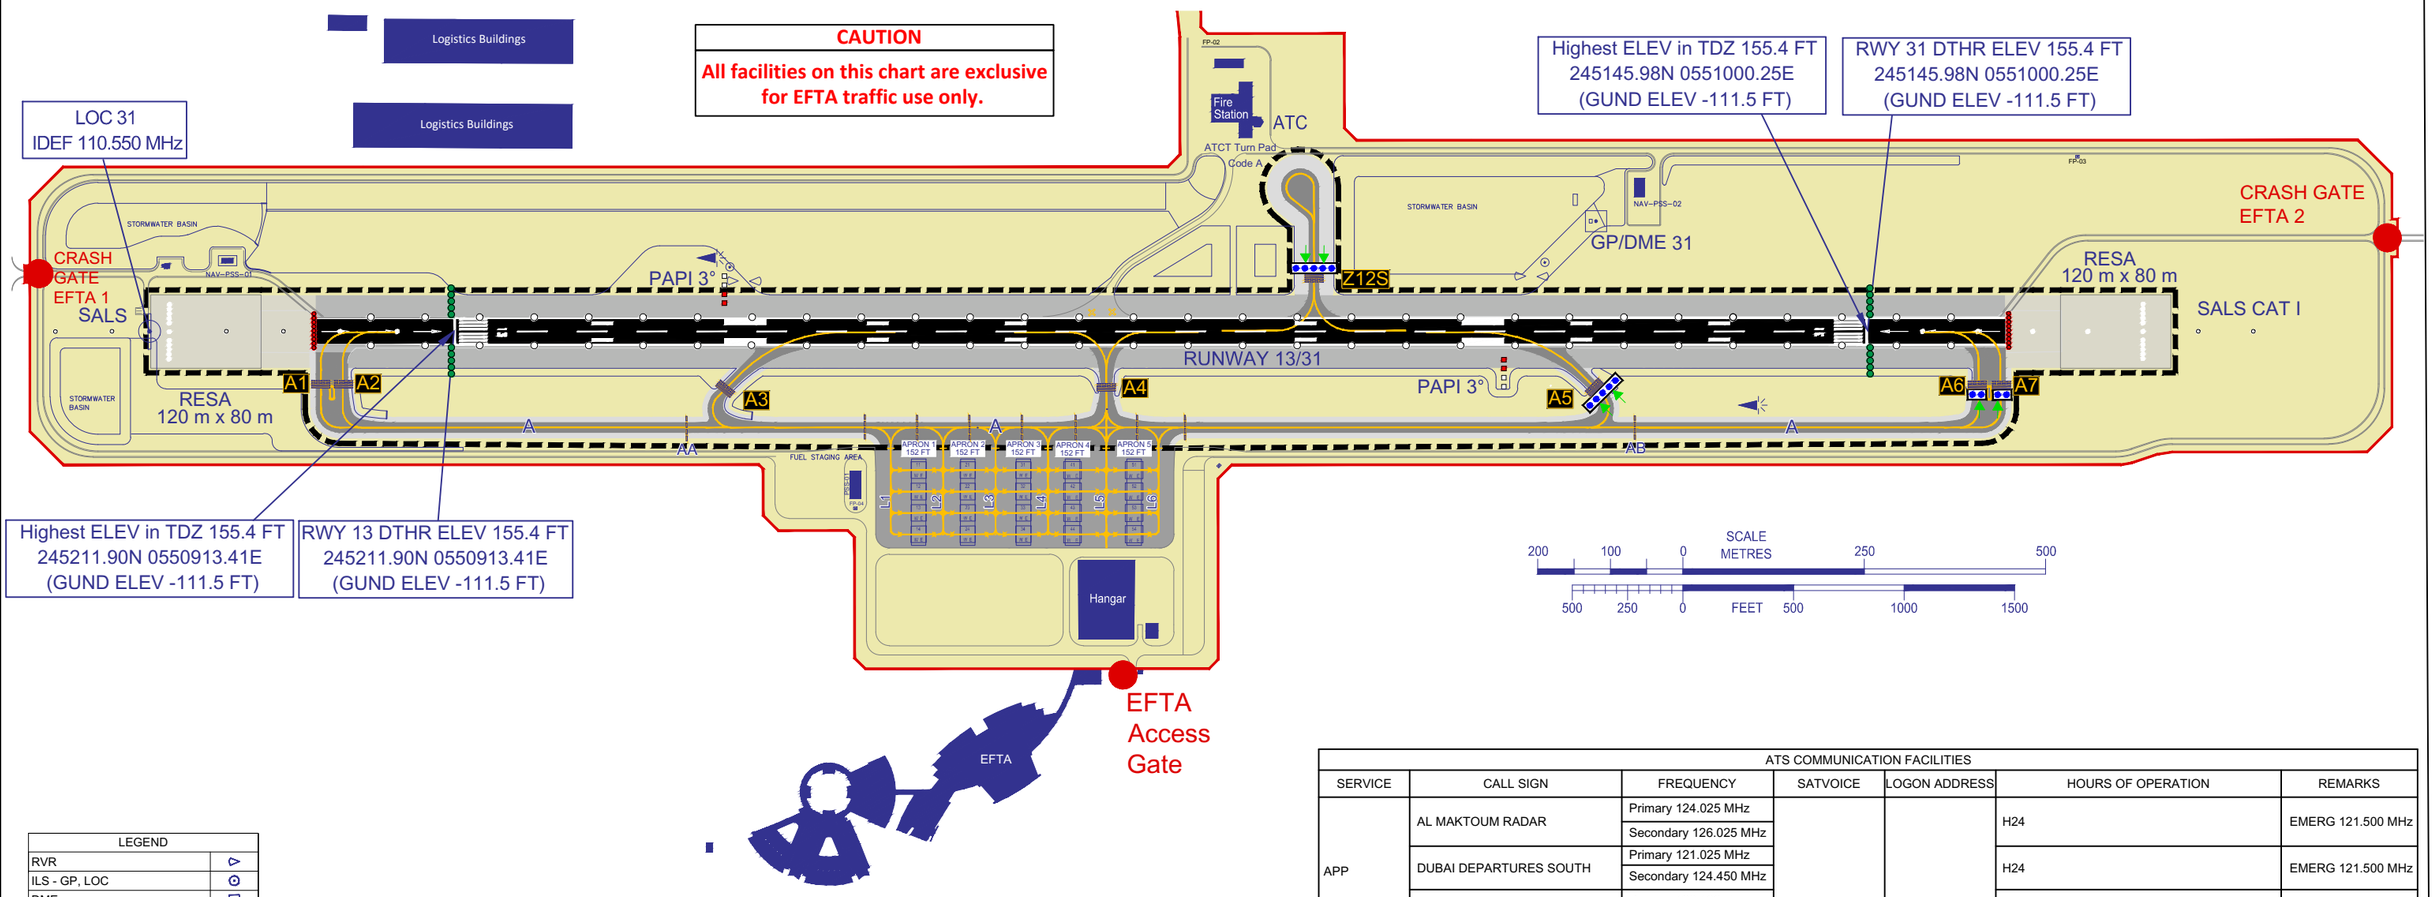

LEGEND	
RVR	
ILS - GP, LOC	
DME	
WDI	
Buildings	
Intermediate Holding Position	
RWY Holding Position Pattern A	
RWY Holding Position Pattern B	
RWY Holding Position designator	
AD Boundary	
Airside/landside gate	
RWY Hold Stopbar CAT I	
ATC Service Boundary	
Traffic Direction	

N
VAR 2° E (2020)
ANNUAL RATE
OF CHANGE 0.05° E

RWY DESIGNATION	DIRECTION	DIMENSION OF RWY (M)	STRENGTH (PCN) AND SURFACE OF RWY
13	119°	1838 x 30	6/F/B/Y/T Asphalt
31	299°	1838 x 30	6/F/B/Y/T Asphalt

See OMDW AD 2.8.1 for Apron Details

See OMDW AD 2.8.2 for Taxiways Details

ATS COMMUNICATION FACILITIES

SERVICE	CALL SIGN	FREQUENCY	SATVOICE	LOGON ADDRESS	HOURS OF OPERATION	REMARKS
APP	AL MAKTOUM RADAR	Primary 124.025 MHz Secondary 126.025 MHz	Not Implemented	Not Implemented	H24	EMERG 121.500 MHz
	DUBAI DEPARTURES SOUTH	Primary 121.025 MHz Secondary 124.450 MHz			H24	EMERG 121.500 MHz
	DUBAI SOUTH RADAR	Primary 120.400 MHz Secondary 126.025 MHz			H24	EMERG 121.500 MHz See OMDW AD 2.18
EFTA TWR	ACADEMY TOWER	Primary 118.775 MHz Secondary 119.000 MHz			01st JAN - 31st MAY 0400 - 2000 01st JUN - 30th SEP 0200 - 1000 and 1200 - 2000 01st OCT - 31st DEC 0300 - 1900	EMERG 121.500 MHz
EFTA APRON	ACADEMY APRON INFORMATION	118.700 MHz				
TWR	AL MAKTOUM TOWER	Primary 118.625 MHz Secondary 118.725 MHz			H24	EMERG 121.500 MHz

CHANGES: Updated Basemap.