


TAXIWAY INCURSION HOT SPOT AREAS

ARP 245506N
0551032E






AD ELEV 171 FT

ELEVATIONS IN FEET AMSL
DIMENSIONS IN METRES

Note: See details in subsequent text page(s).

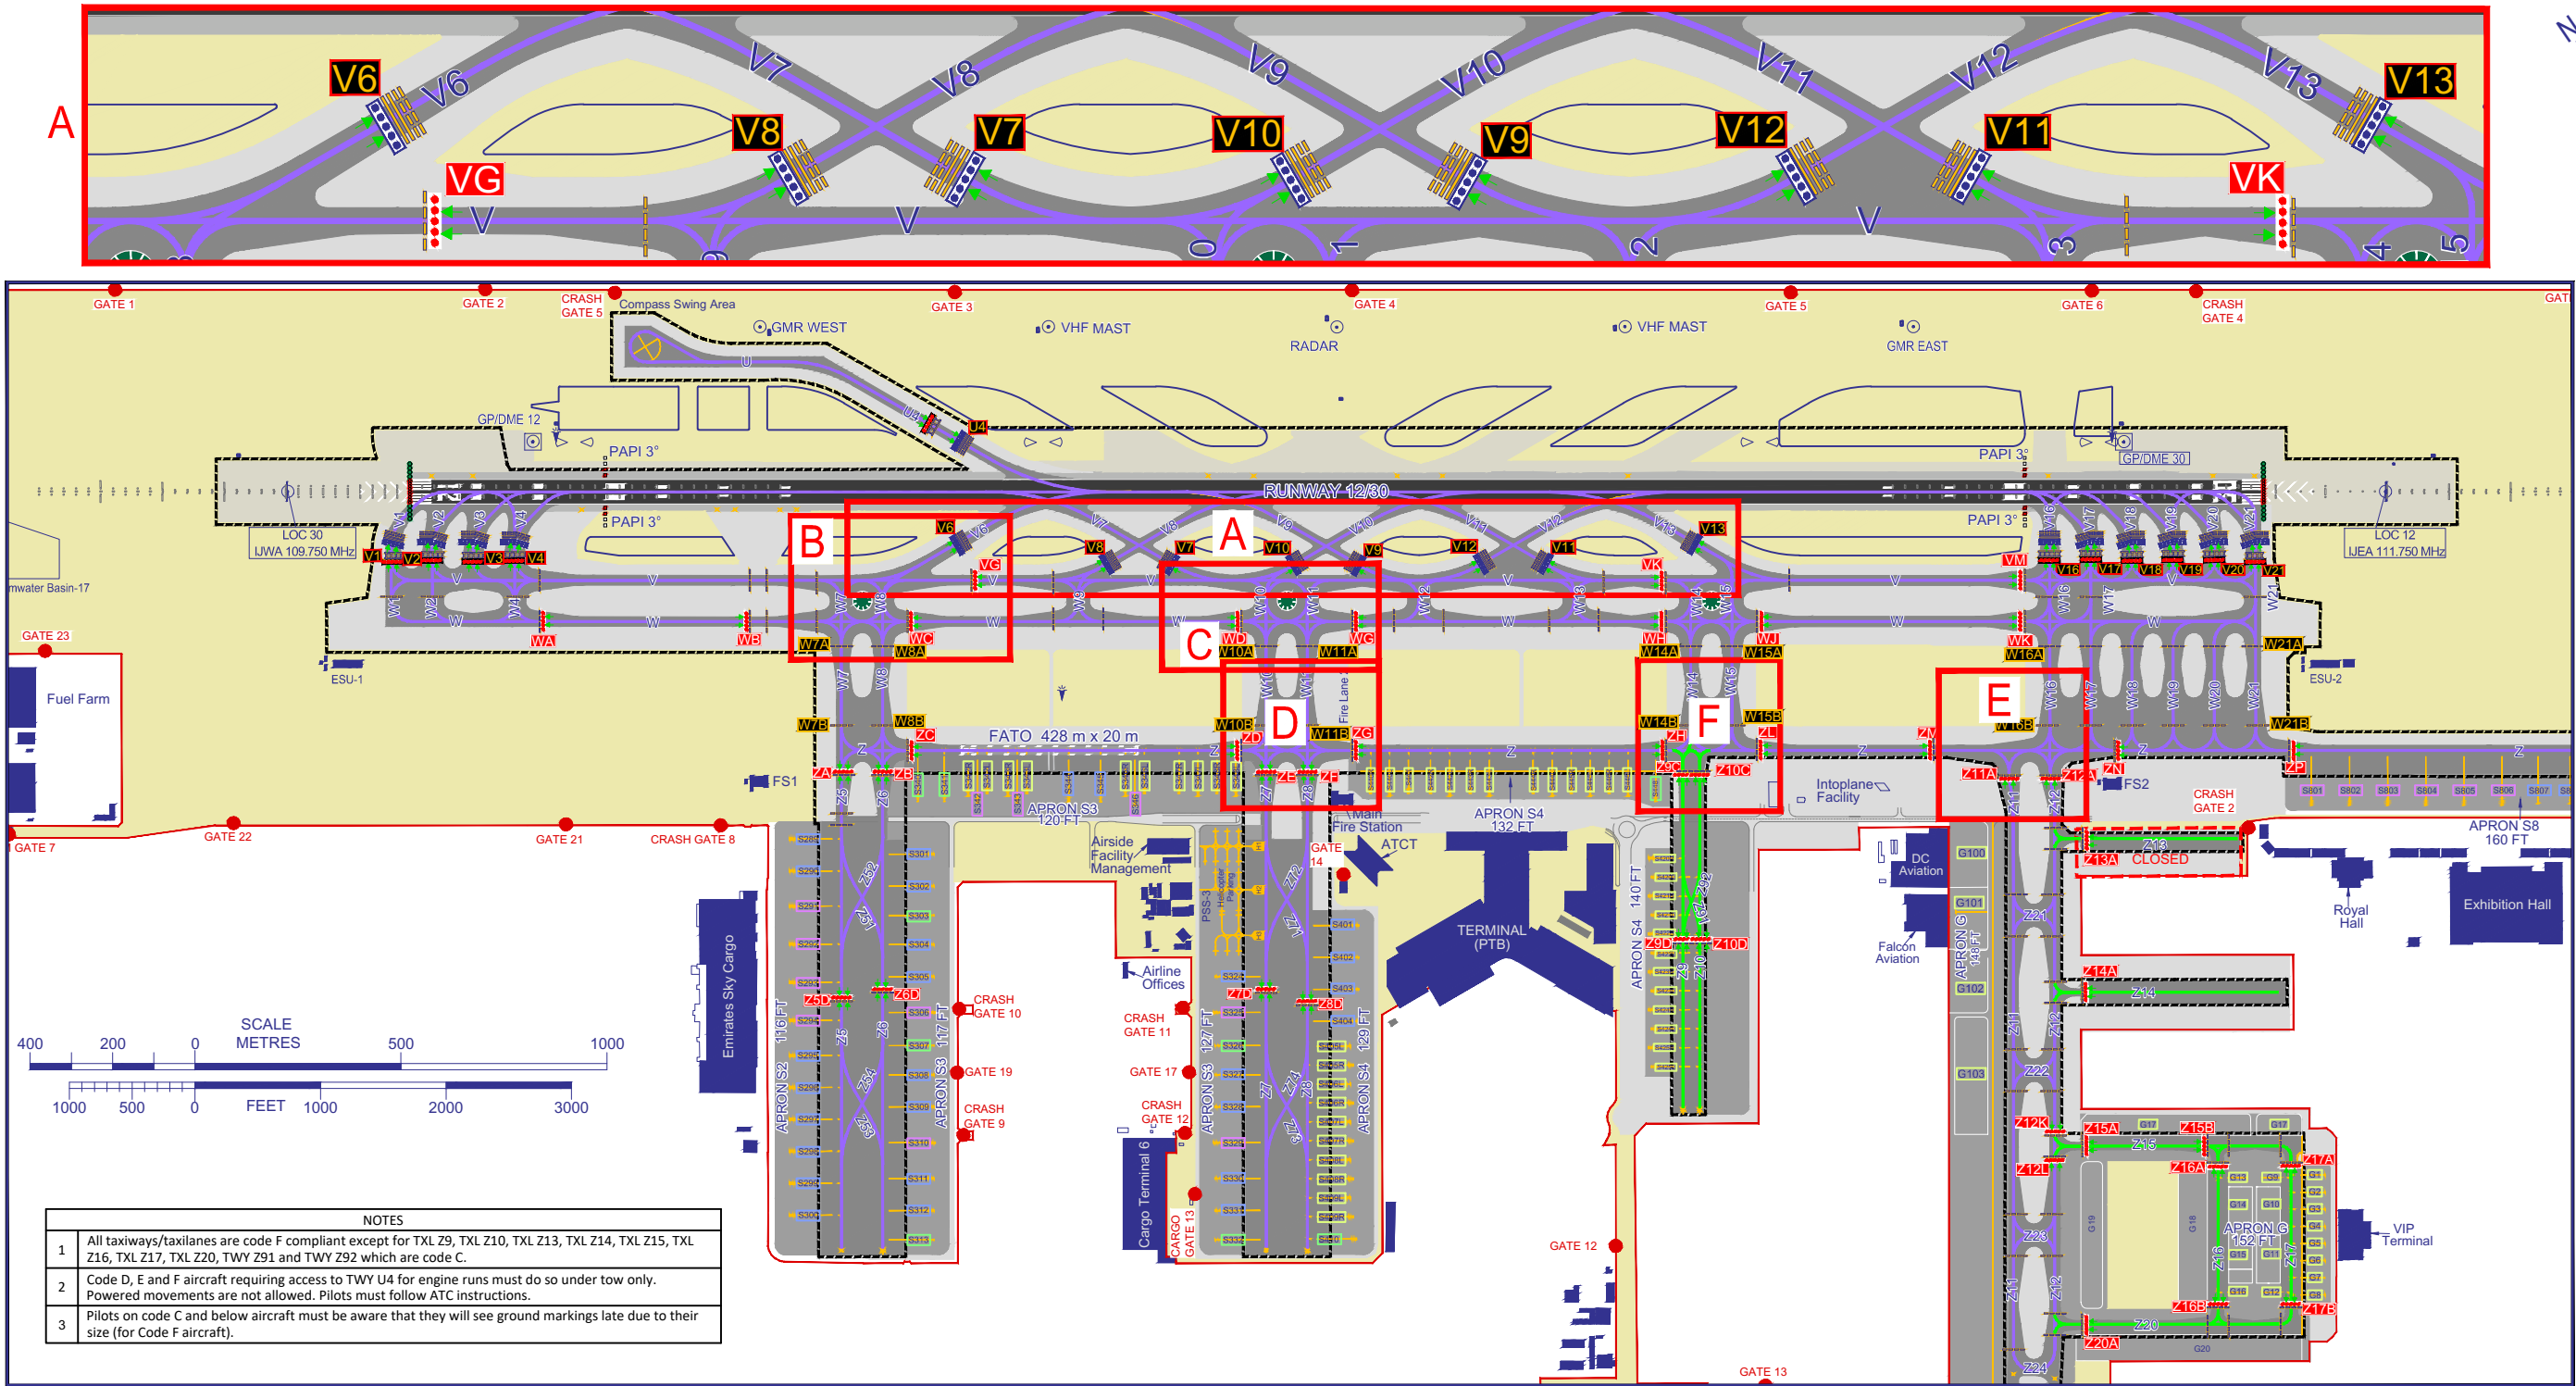

NOTES	
1	All taxiways/taxilanes are code F compliant except for TXL Z9, TXL Z10, TXL Z13, TXL Z14, TXL Z15, TXL Z16, TXL Z17, TXL Z20, TWY Z91 and TWY Z92 which are code C.
2	Code D, E and F aircraft requiring access to TWY U4 for engine runs must do so under tow only. Powered movements are not allowed. Pilots must follow ATC instructions.
3	Pilots on code C and below aircraft must be aware that they will see ground markings late due to their size (for Code F aircraft).

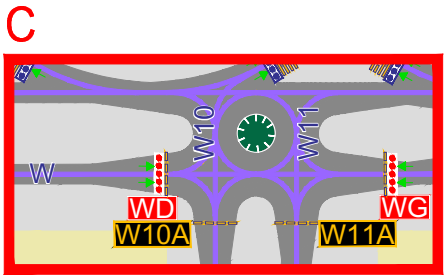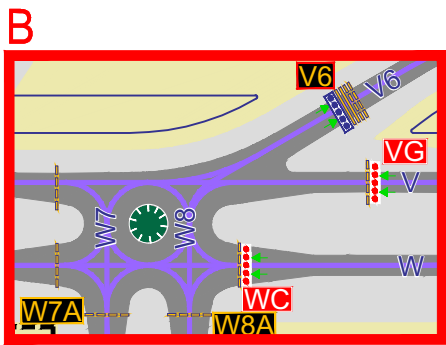

LEGEND	
RVR	ITHP Stopbar
ILS - GP, LOC	RWY Hold Stopbar CAT I
DME	RWY Hold Stopbar CAT II/III
WDI	Stand CODE C
Buildings	Stand CODE D
IHP	Stand CODE E
IHP Designator (Full Stopbar)	Stand CODE F
IHP Designator (Yellow Lights)	Traffic Direction
RWY HLDG PSN Designator	Code C (and below) Operations
RWY HLDG PSN Pattern A	Code F (and below) Operations
RWY HLDG PSN Pattern B	Hot Spot Areas
Airside/Landside Gate	ATC Service Boundary
AD Boundary	