AERODROME CHART - ICAO

ARP	AD ELEV 94 FT
253648N 0555620E	

RAS AL KHAIMAH/ International
United Arab Emirates

ELEVATIONS IN FEET
DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

VAR 2°E (2018)

ANNUAL RATE
OF CHANGE 0.05° E

RWY	DECLARED DISTANCES (M)			
	TORA	TODA	ASDA	LDA
16	3760	3760	3810	3760
34	3760	3760	3760	3760

LEGEND	
IRVR	
ILS, GP	
DME	
VOR	
Wind Direction Indicator	
Buildings	
RWY Holding Position Pattern A	
Airside Boundary Fence	
ATC Service Boundary	

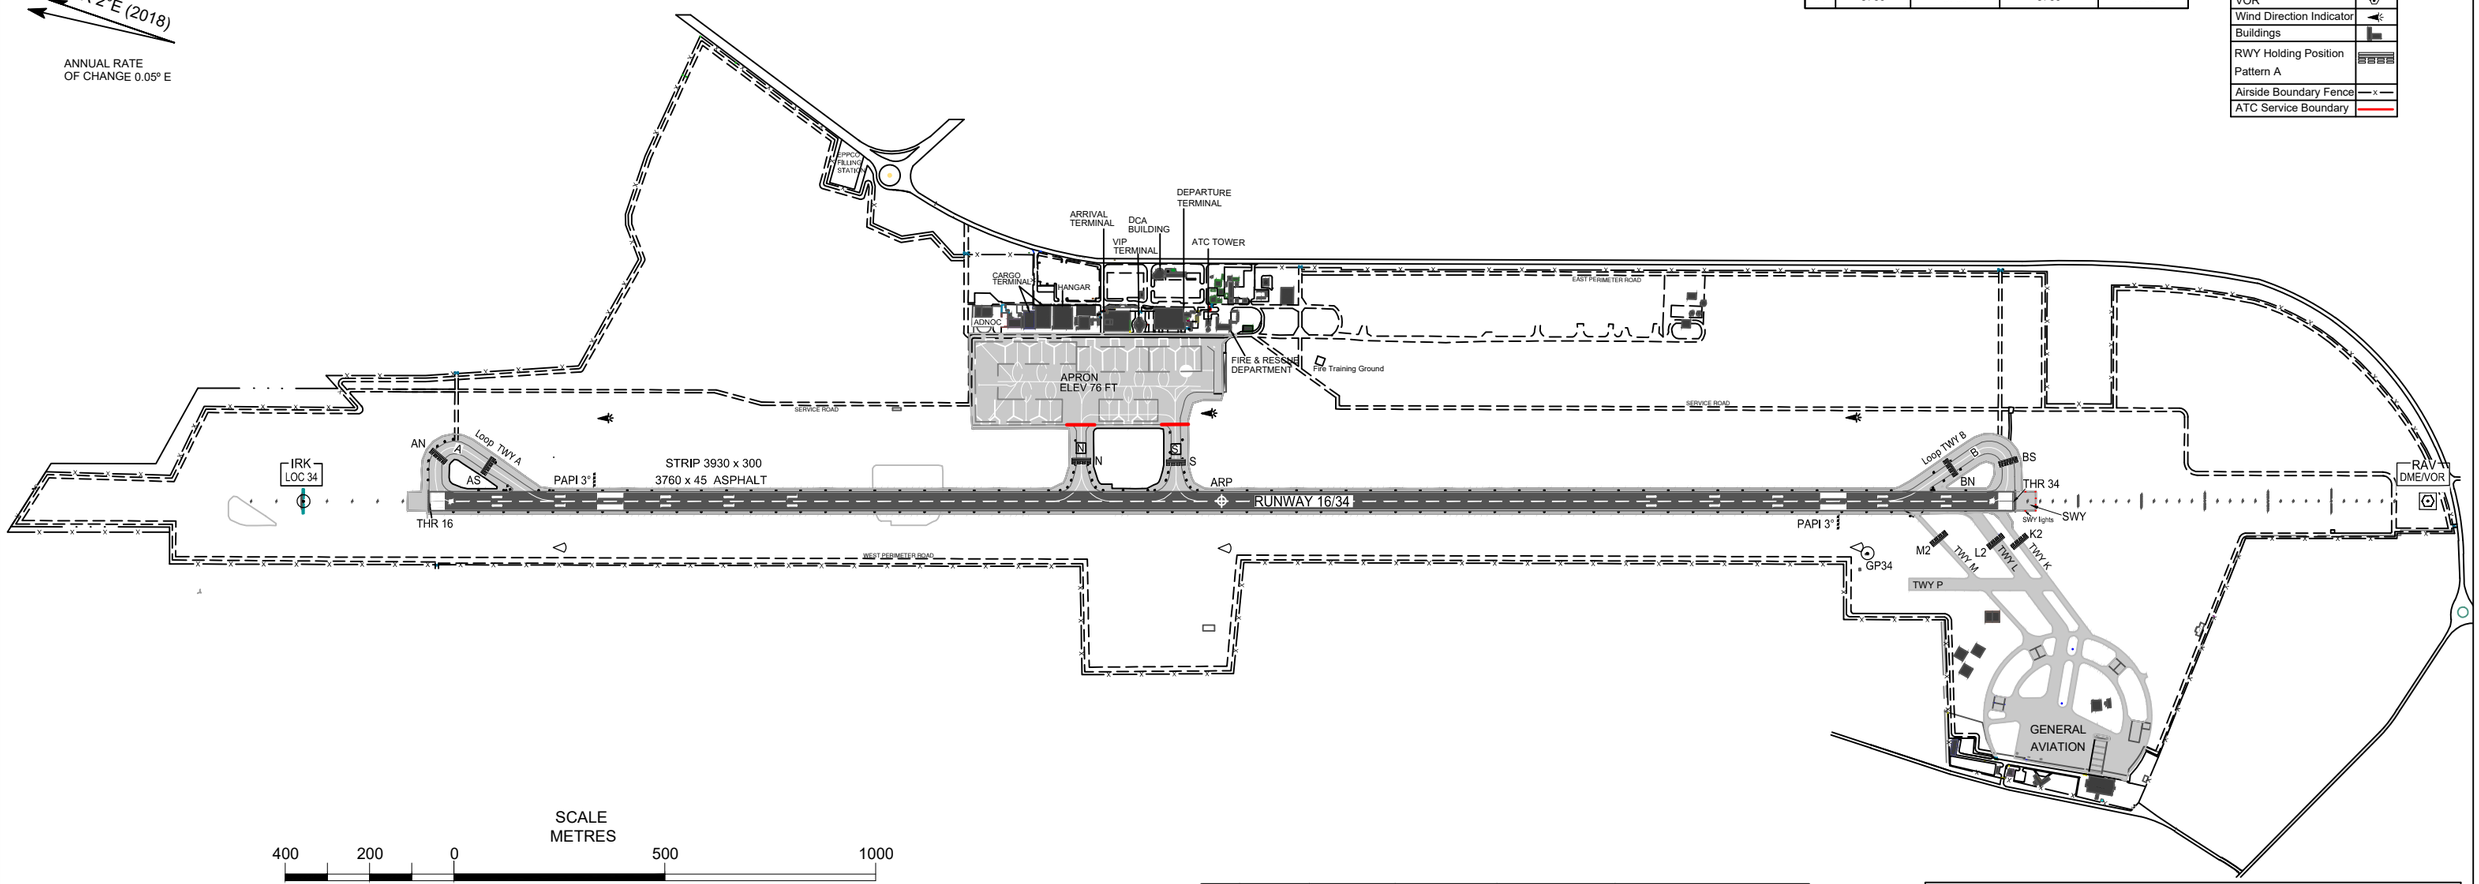

SCALE
METRES

400 200 0 500 1000

1000 500 0 1000 2000 3000

FEET

RWY	TRUE/MAG Bearing	Dimension of RWY (M)	Strength (PCN) and surface of RWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
16	164°/163°	3760 x 45	57/F/B/W/T Asphalt	253747.09N 0555602.08E NIL -102.0 FT	64 FT NIL
34	344°/343°	3760 x 45	57/F/B/W/T Asphalt	253549.20N 0555637.51E NIL -101.7FT	94.1 FT NIL

* TAXIWAYS load bearing Strengths in AD 2.8.2

ATS COMMUNICATION FACILITIES			
Service	Call Sign	Frequency (MHZ)	Remarks
APP (APS)	RAS AL KHAIMAH APPROACH RADAR	124.000	NIL
APP	RAS AL KHAIMAH APPROACH	118.250	NIL
TWR	RAS AL KHAIMAH TOWER	118.250	Aircraft / Vehicles
GND	RAS AL KHAIMAH GROUND	121.750	Vehicles / follow-me service
ATIS	RAS AL KHAIMAH INTERNATIONAL AIRPORT	126.075	ARR/DEP

CHANGES: Amended COM FAC table. Editorial.