


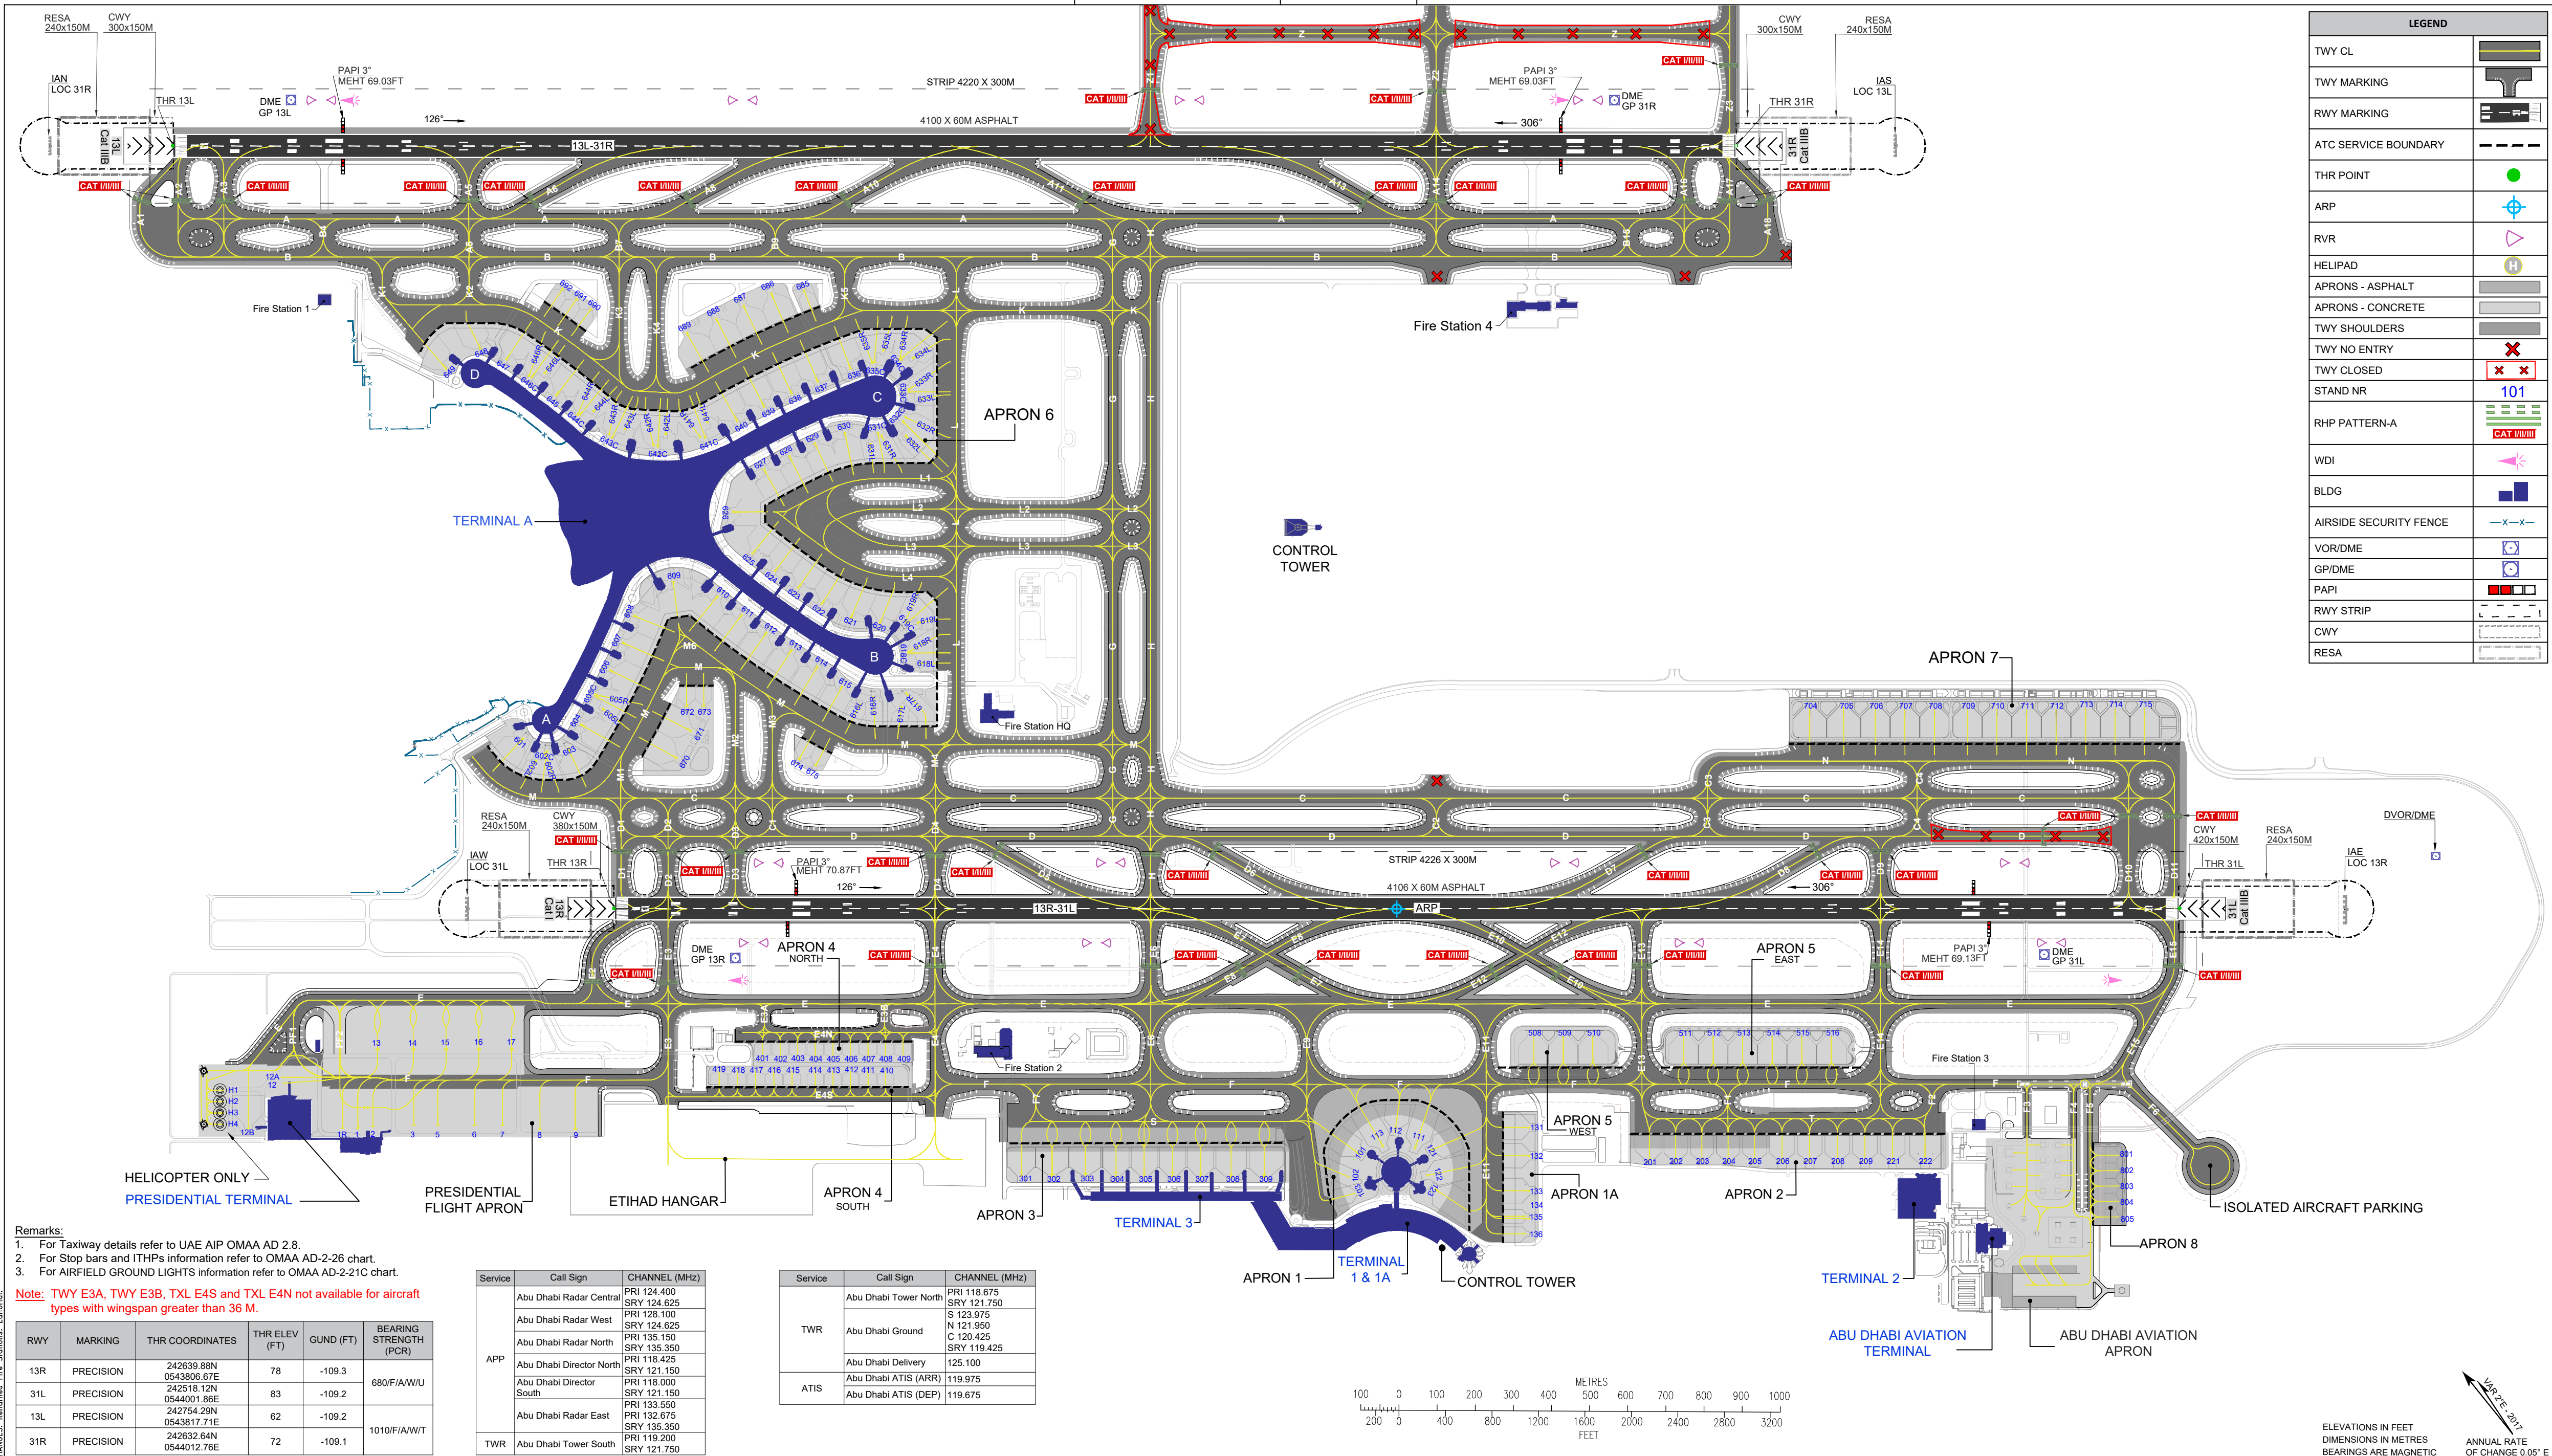

Remarks:
1. For Taxiway details refer to UAE AIP OMAA AD 2.8.
2. For Stop bars and ITHPs information refer to OMAA AD-2-26 chart.
3. For AIRFIELD GROUND LIGHTS information refer to OMAA AD-2-21C chart.

Note: TWY E3A, TWY E3B, TXL E4S and TXL E4N not available for aircraft types with wingspan greater than 36 M.

RWY	MARKING	THR COORDINATES	THR ELEV (FT)	GUND (FT)	BEARING STRENGTH (PCR)
13R	PRECISION	242639.88N 0543806.67E	78	-109.3	680/F/A/W/U
31L	PRECISION	242518.12N 0544001.86E	83	-109.2	
13L	PRECISION	242754.29N 0543817.71E	62	-109.2	
31R	PRECISION	242632.64N 0544012.76E	72	-109.1	1010/F/A/W/T

Service	Call Sign	CHANNEL (MHz)
APP	Abu Dhabi Radar Central	PRI 124.400 SRY 124.625
	Abu Dhabi Radar West	PRI 128.100 SRY 124.625
	Abu Dhabi Radar North	PRI 135.150 SRY 135.350
	Abu Dhabi Director North	PRI 118.425 SRY 121.150
	Abu Dhabi Director South	PRI 118.000 SRY 121.150
	Abu Dhabi Radar East	PRI 133.550 SRY 132.675
	Abu Dhabi Radar South	PRI 135.350 SRY 119.200
TWR	Abu Dhabi Tower South	SRY 121.750

Service	Call Sign	CHANNEL (MHz)
TWR	Abu Dhabi Tower North	PRI 118.675 SRY 121.750
	Abu Dhabi Ground	S 123.975 N 121.950 C 120.425 SRY 119.425
ATIS	Abu Dhabi Delivery	125.100
	Abu Dhabi ATIS (ARR)	119.975
	Abu Dhabi ATIS (DEP)	119.675

ELEVATIONS IN FEET
DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC
ANNUAL RATE OF CHANGE 0.05° E