


STANDARD DEPARTURE CHART-
INSTRUMENT (SID) - ICAO

AD ELEV 83 FT ABU DHABI / ZAYED INTL

RNAV 1 SID RWY 13R

ATUDO 5G, BOSEV 1G, DAXIB 1G, KANIP 3G, LORID 1G, MEKRI 1G, ORNEL 1G, TULON 1G

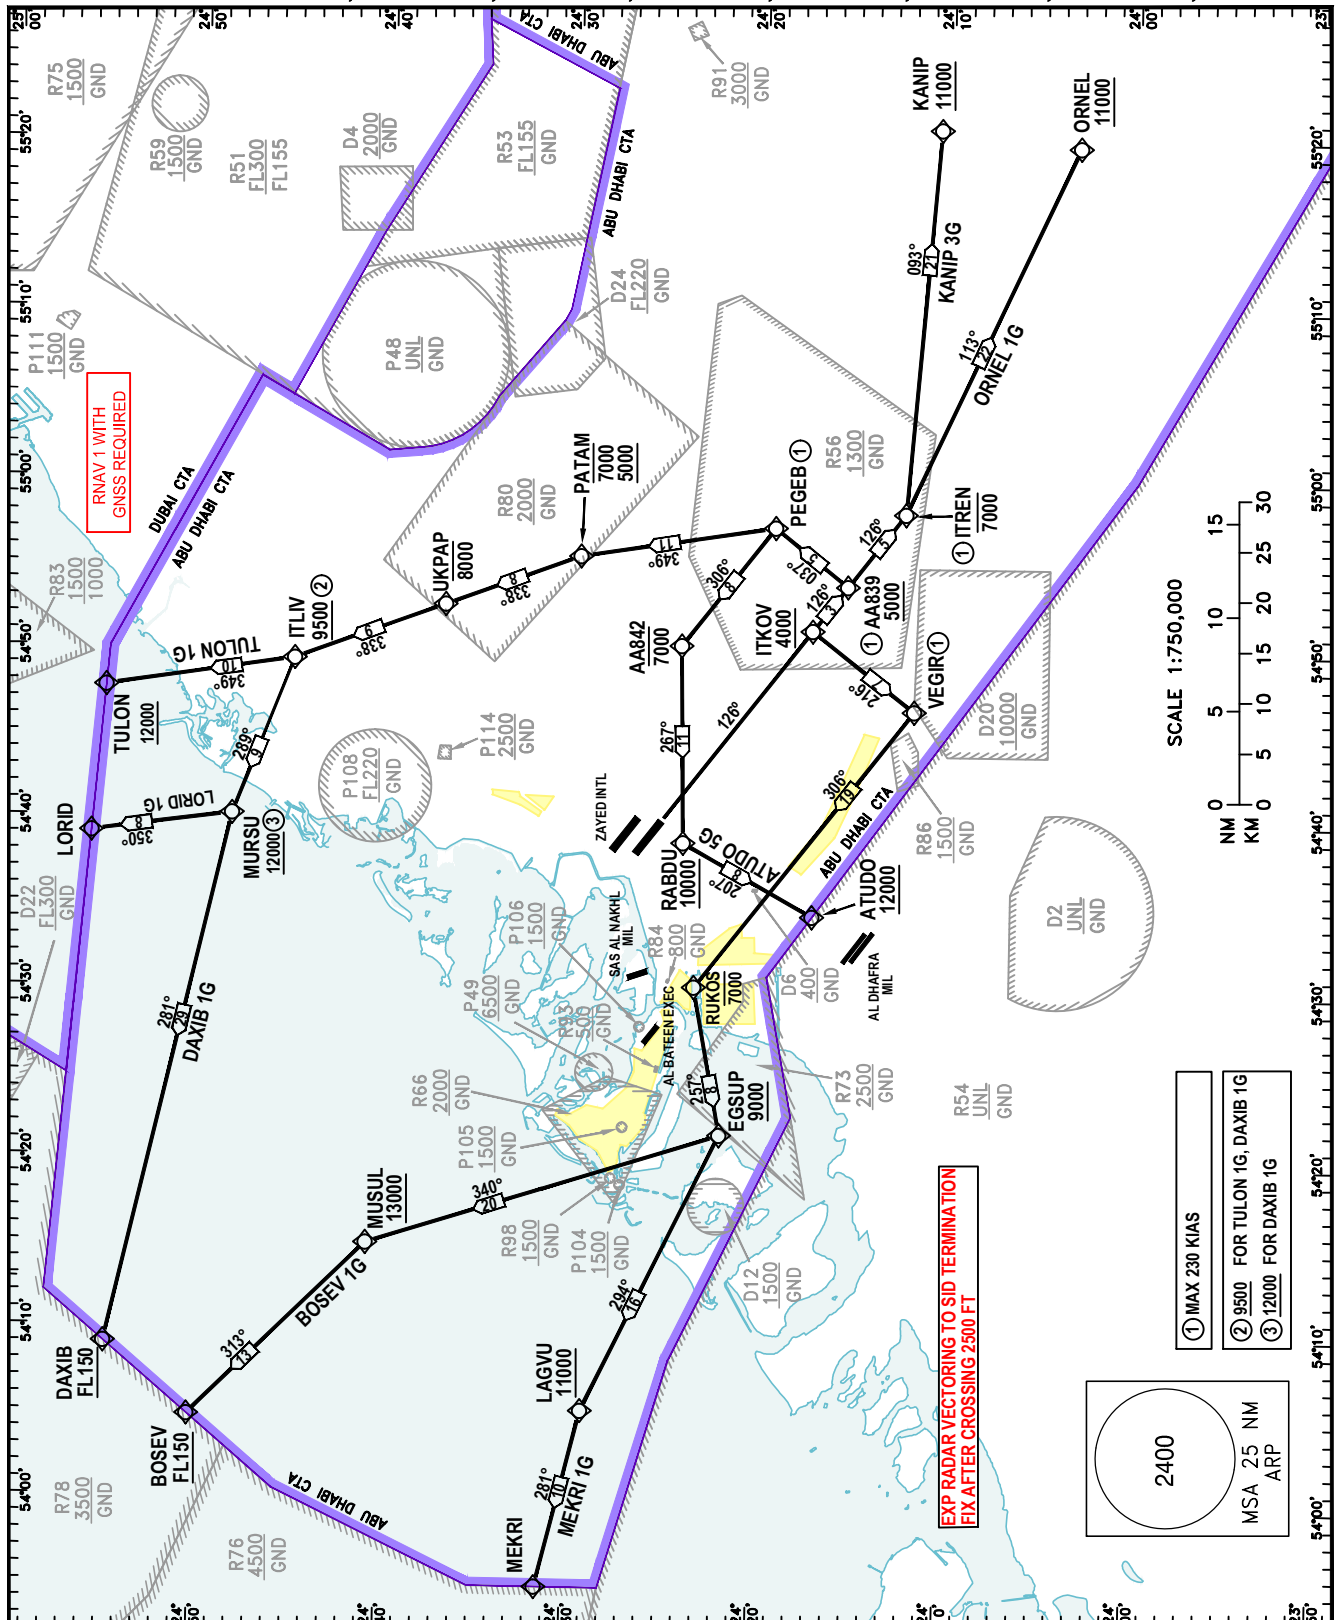


CHANGES: Added R86. Editorial.

ATIS	119.675
ABU DHABI RADAR (W)	128.100
ABU DHABI RADAR (C)	124.400
ABU DHABI DIRECTOR (S)	118.000
ABU DHABI DIRECTOR (N)	118.425
ABU DHABI RADAR (E)	133.550
ABU DHABI INFO	127.500
TWR	119.200(S) 118.675(N)
GND	123.975(S) 121.950(N) 120.425(C)

FOR ROUTE DESCRIPTION
SEE OMAA AD 2.22
TRANSITION ALTITUDE
13,000 FT

VAR 2°E (2017)

BEARINGS ARE MAGNETIC
ELEV, ALT, HGT IN FEET
Refer ENR 5.1 for vertical limits details



NOTES

Do not climb above ATC
cleared level.

RESTRICTIONS

On DEP climb to 5000 FT
only. Further climb when
instructed by Abu Dhabi
RADAR

MNM required climb
gradient 5% to 8,000FT
(300 FT per NM)

MAX 250 KIAS below
10,000 FT

DEP ACFT shall CTC
ABU DHABI RADAR (C)
on 124.400 MHz as
soon as possible APSPG
1000 FT unless
otherwise instructed by
ABU DHABI TWR.