


INSTRUMENT
APPROACH
CHART-ICAO

AD ELEV 83 FT
HEIGHTS RELATED TO
THR RWY 31L ELEV 83 FT

ABU DHABI
RADAR (W) 128.100
ABU DHABI
RADAR (C) 124.400
ABU DHABI
DIRECTOR (S) 118.000
ABU DHABI
DIRECTOR (N) 118.425

133.550
ABU DHABI
INFO 127.500
TWR 119.200(S)
118.675(N)
123.975(S)
121.950(N)
120.425(C)

ABU DHABI/ZAYED INTL
RNP Y RWY 31L (AR)
CAT A-DL

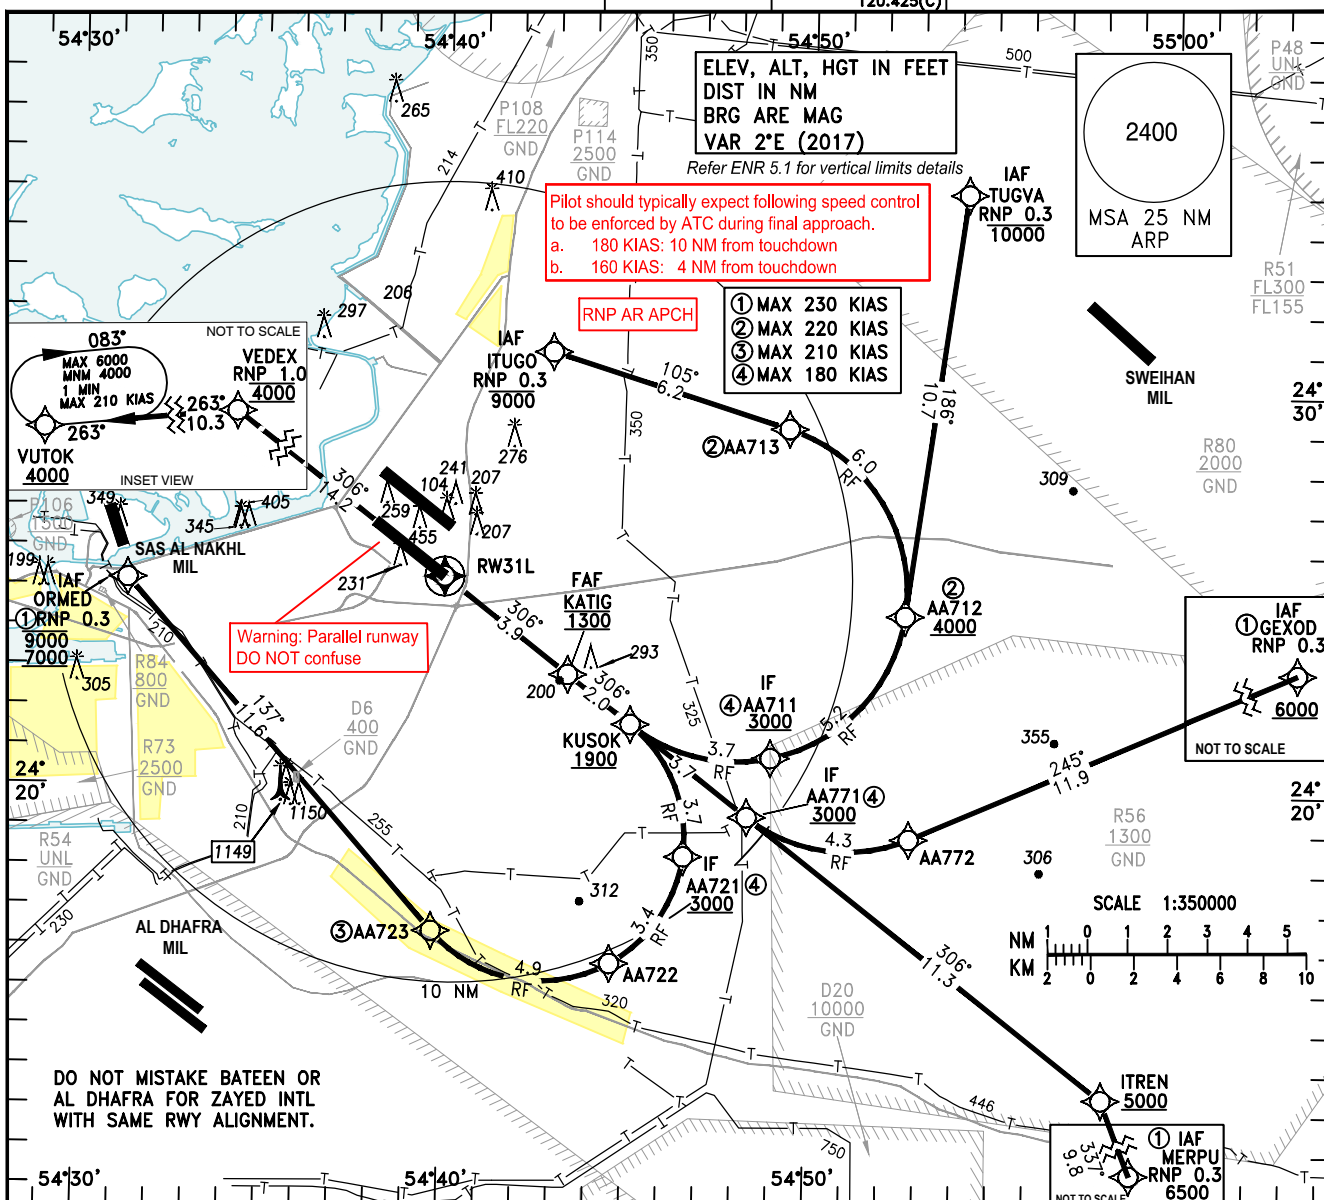

MISSED APPROACH:

Climb straight ahead to VEDEX at 4000 FT (MAX 210 KIAS), to VUTOK and hold.

ELEV 83
(THR RWY 31L)

TCH 50 FT

NM FROM THR RWY 31L 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

DA/(H)		A	B	C	D	D _L	NOTE							
Straight-in Approach							1. Authorization Required 2. RF Required 3. Dual GNSS and IRU Required 4. For uncompensated Baro-VNAV systems procedure not authorized below 0°C or above 69°C							
	RNP 0.3	450(367)	460(377)	470(387)	480(397)	480(397)								
				Distance from RWY31L		NM	1	2	3	4	5	6		
				Altitude		FT	430	727	1025	1322	1619	1916		
				Ground Speed		KTS	80	100	120	140	160	180		
				Rate of Descent (2.8°)		FT/MIN	400	495	595	690	790	890		