



INSTRUMENT
APPROACH
CHART-ICAO

AD ELEV 83 FT
HEIGHTS RELATED TO
THR RWY 13L ELEV 62 FT

ABU DHABI
RADAR (W)
128.100
ABU DHABI
RADAR (C)
124.400
ABU DHABI
DIRECTOR (S)
118.000
ABU DHABI
DIRECTOR (N)
118.425

ABU DHABI
RADAR (E)
133.550
ABU DHABI
INFO
TWR
127.500
119.200(S)
118.675(N)
123.975(S)
121.950(N)
120.425(C)

ABU DHABI/ZAYED INTL
RNP Z RWY 13L
CAT A-D_L

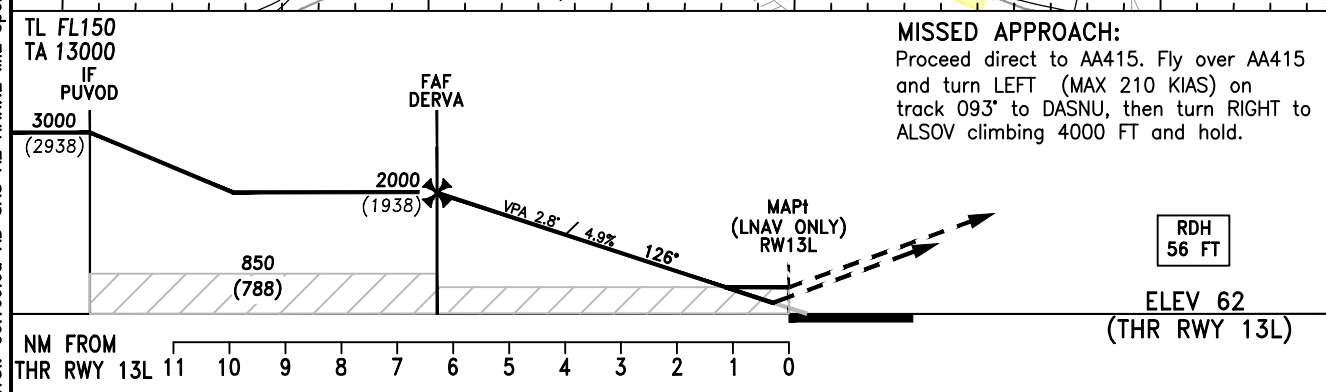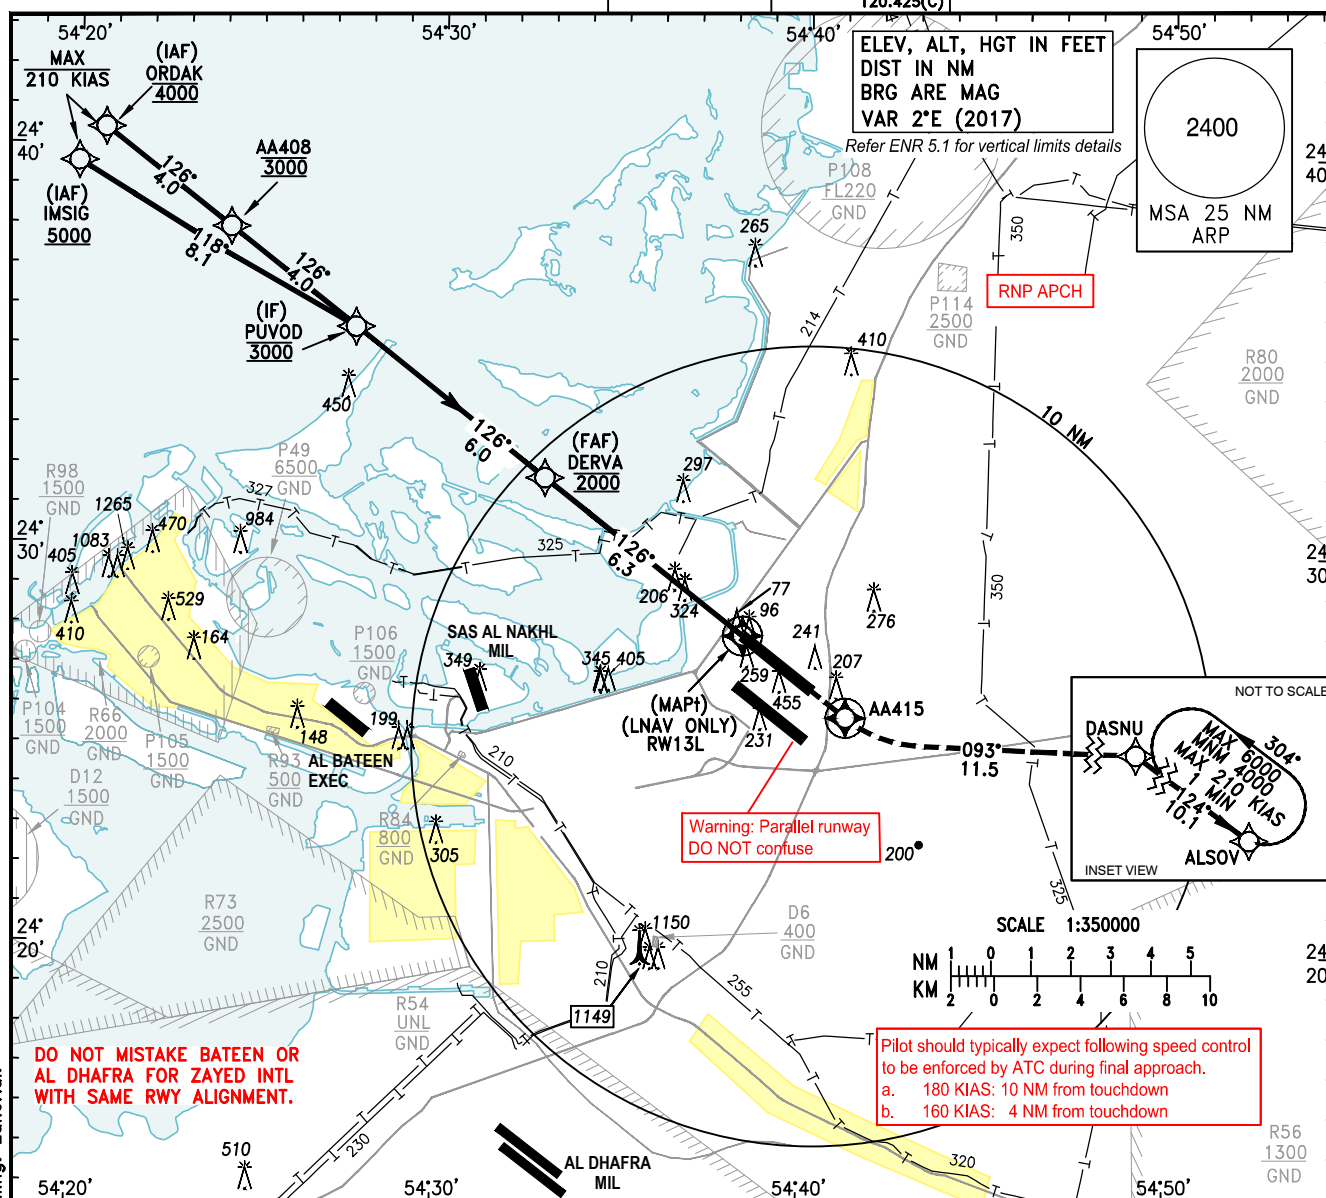

OCA/(H)		A B C D D _L					NOTE				
Straight-in Approach	LNAV/VNAV	350 (288)	360 (298)	380 (318)	410 (348)	410 (348)	1. For uncompensated Baro-VNAV systems procedure not authorized below 0°C or above 69°C.				
	LNAV	510 (448)									
Circling		N/A									
			Distance from RW13L		NM	1	2	3	4	5	6
			Altitude		FT	415	712	1009	1306	1604	1901
			Ground Speed		KTS	80	100	120	140	160	180
			Rate of Descent (2.8°)		FT/MIN	400	495	595	690	790	890