


INSTRUMENT	AD ELEV 83 FT
APPROACH	HEIGHTS RELATED TO
CHART-ICAO	THR RWY 13R ELEV 78 FT

ABU DHABI RADAR (W)	128.100	ABU DHABI RADAR (E)	133.550
ABU DHABI RADAR (C)	124.400	ABU DHABI INFO	127.500
ABU DHABI DIRECTOR (S)	118.000	TWR	119.200(S)
ABU DHABI DIRECTOR (N)	118.425	GND	118.675(N)
			123.975(S)
			121.950(N)
			120.425(C)


ABU DHABI/ZAYED INTL
RNP Z RWY 13R
CAT A-DL

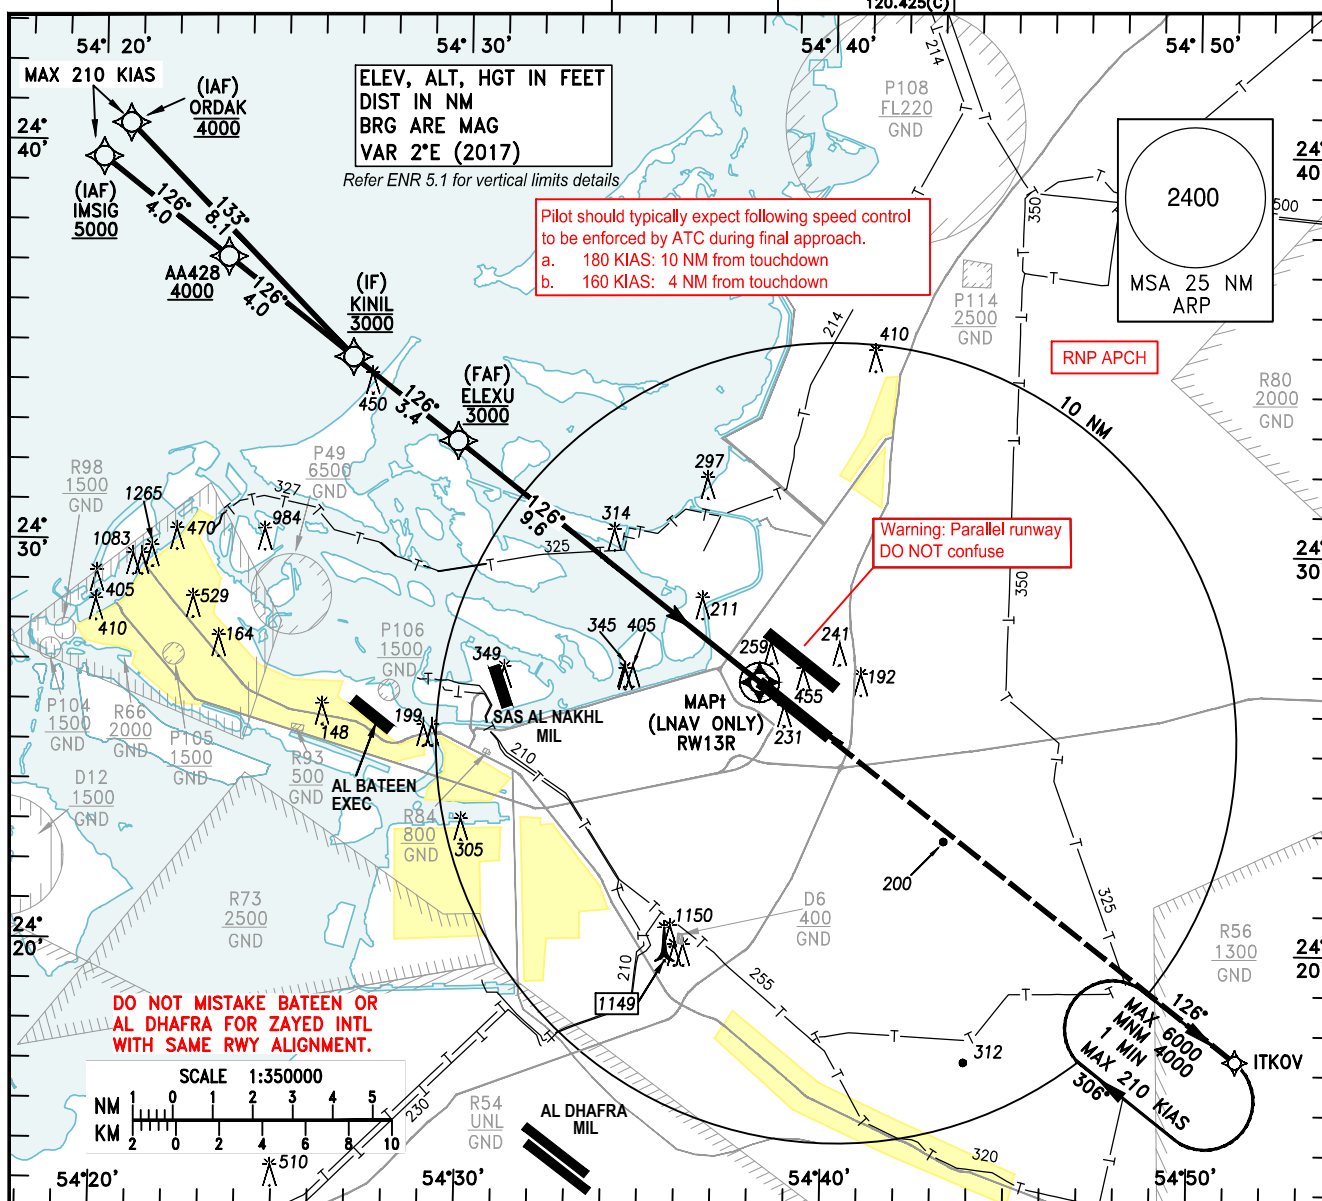

TL FL150
TA 13000

MISSED APPROACH:

Proceed direct to ITKOV
climbing to 4000 FT and hold.

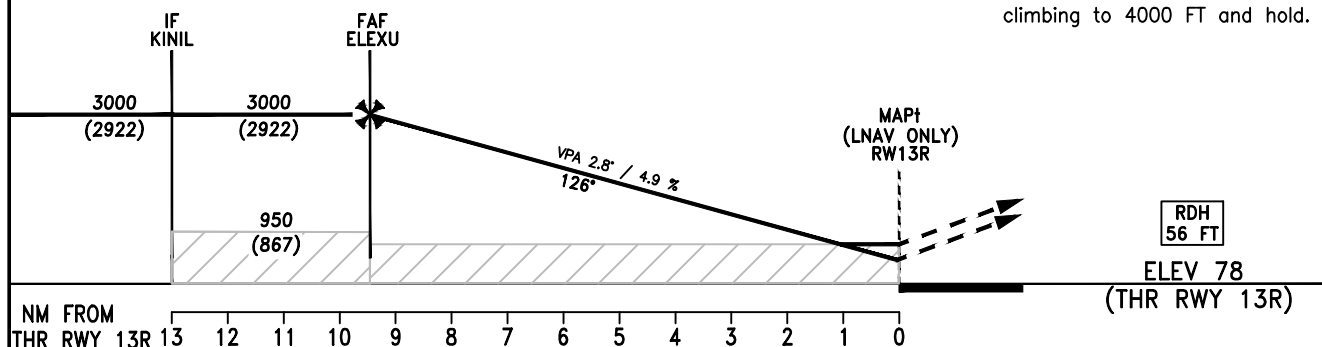

OCA/(H)		A	B	C	D	D _L	NOTE						
Straight-in Approach	LNAV/VNAV	420 (342)	430 (352)	450 (372)	480 (402)	480 (402)	1. For uncompensated Baro—VNAV systems procedure not authorized below 0°C or above 69°C.						
	LNAV	600 (517)											
Circling		N/A											
				Distance from RW13R		NM	1	2	3	4	5	6	
				Altitude		FT	432	729	1026	1323	1621	1918	
				Ground Speed		KTS	80	100	120	140	160	180	
				Rate of Descent (2.8")		FT/MIN	400	495	595	690	790	890	

CHANGES: Amended Transmission line.