

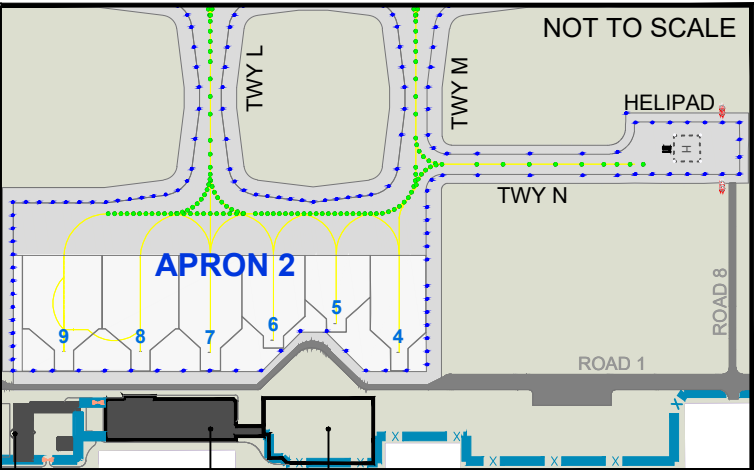
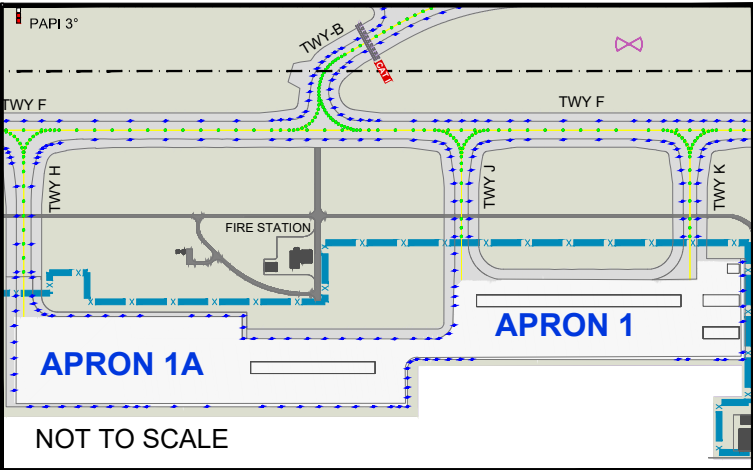
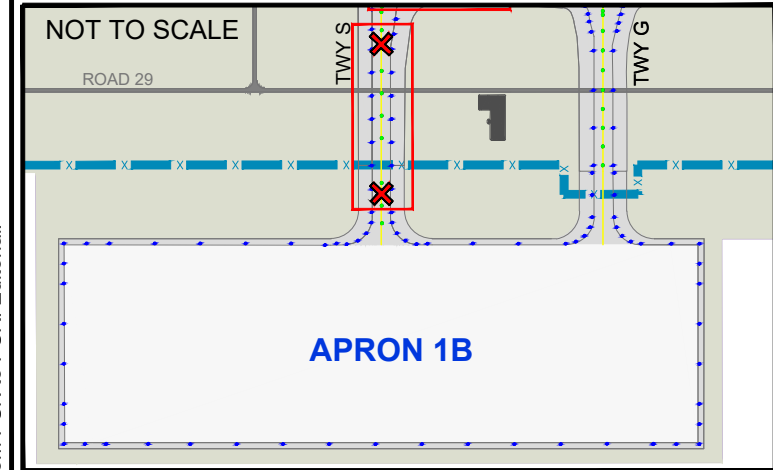
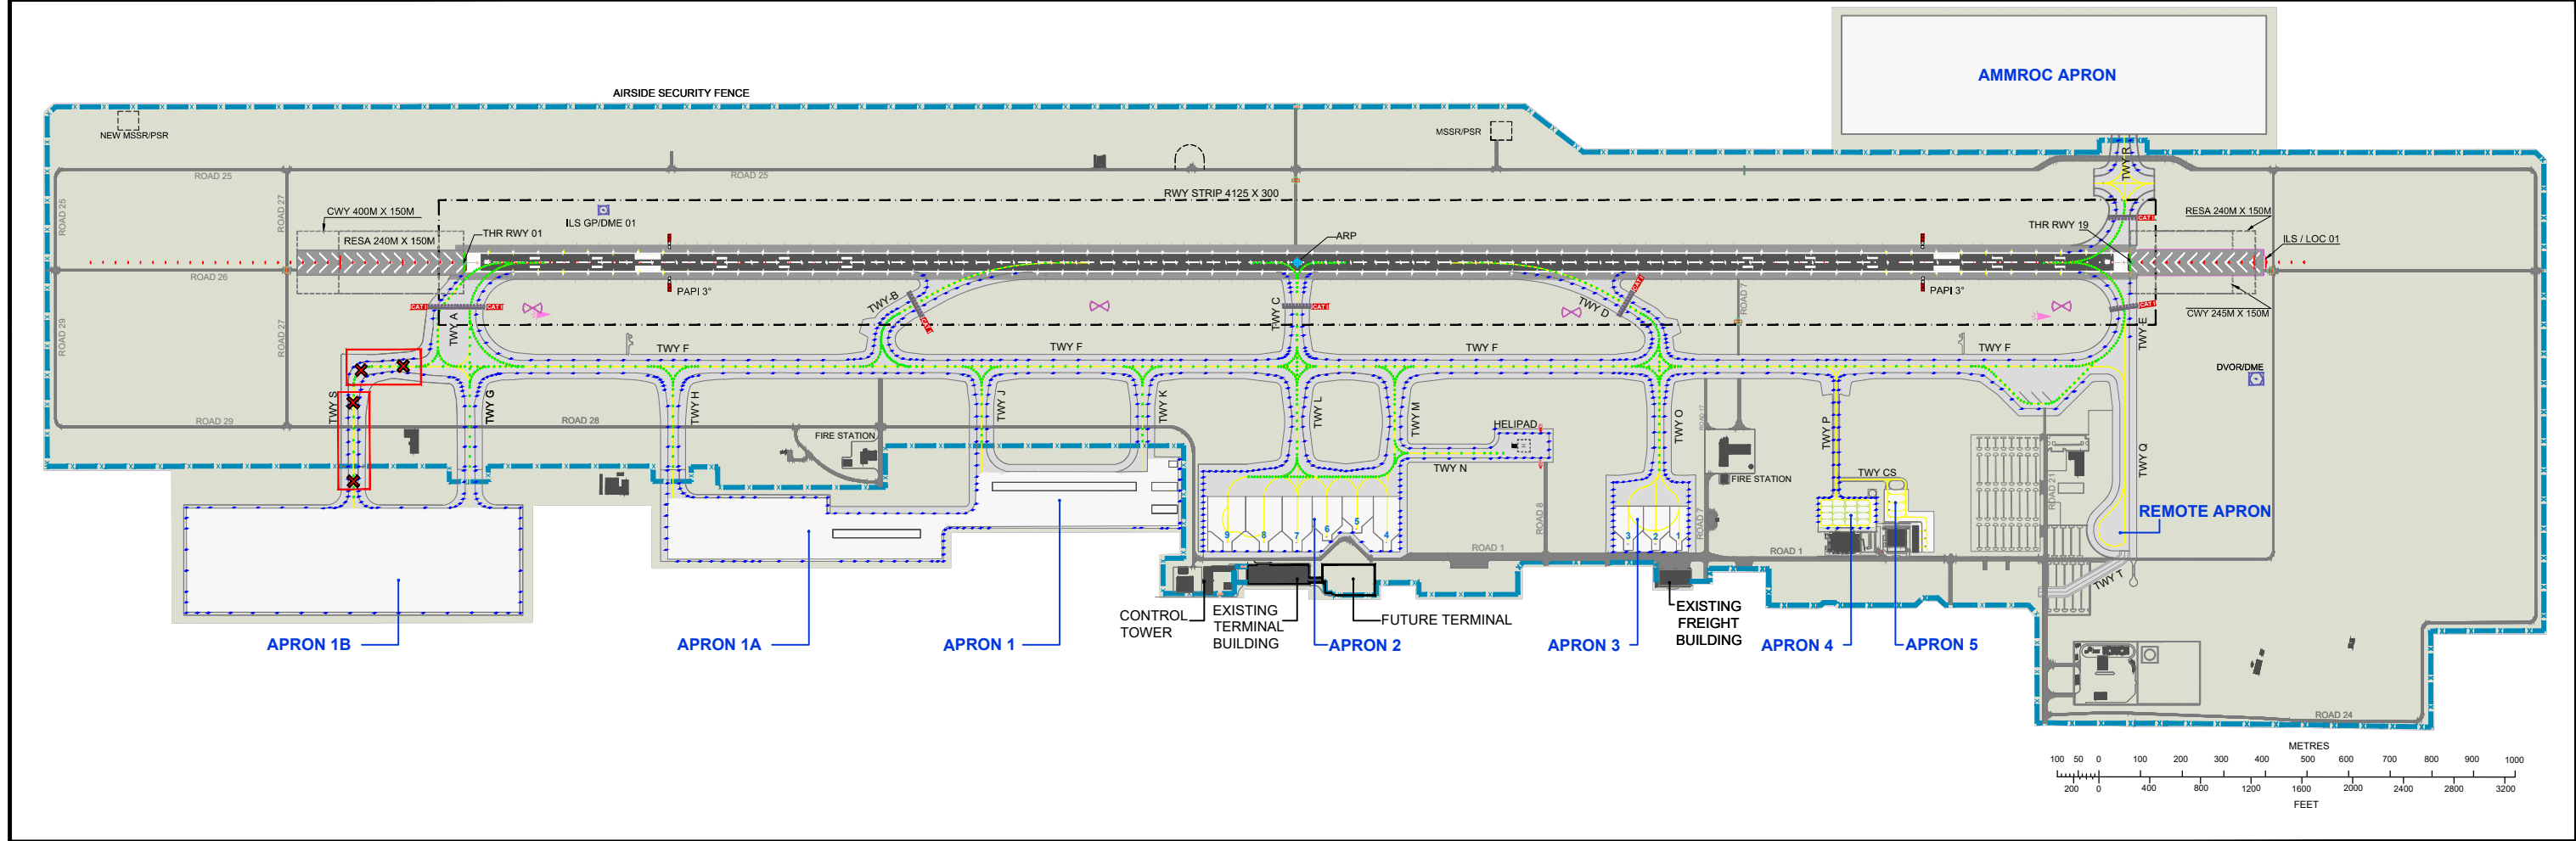


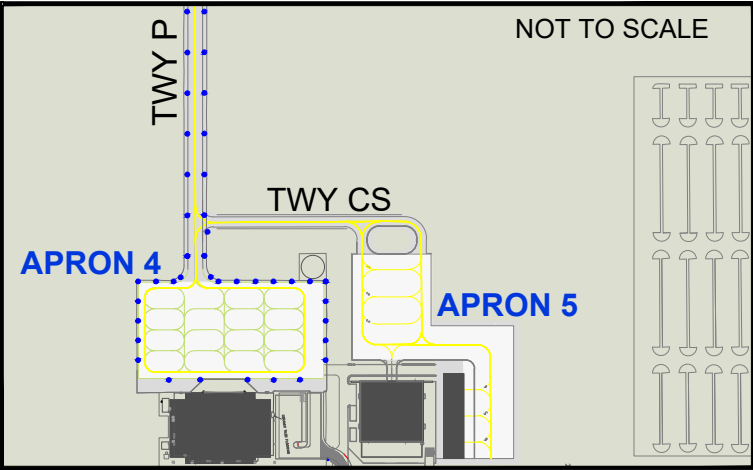

APRON DATA			
Description	Surface	Strength (PCR)	ELEV (FT)
Apron 1	Concrete	570/R/A/W/U	856
Apron 1A	Concrete	570/R/A/W/U	856
Apron 1B	Concrete	570/R/A/W/U	856
Apron 2	Concrete	570/R/A/W/U	833
Apron 3	Concrete	570/R/A/W/U	817
Apron 4	Asphalt	480/F/A/W/U	821
Apron 5	Asphalt	480/F/A/W/U	821
Remote Apron	Asphalt	480/F/A/W/U	830
AMMROC Apron	Concrete	570/R/A/W/U	832

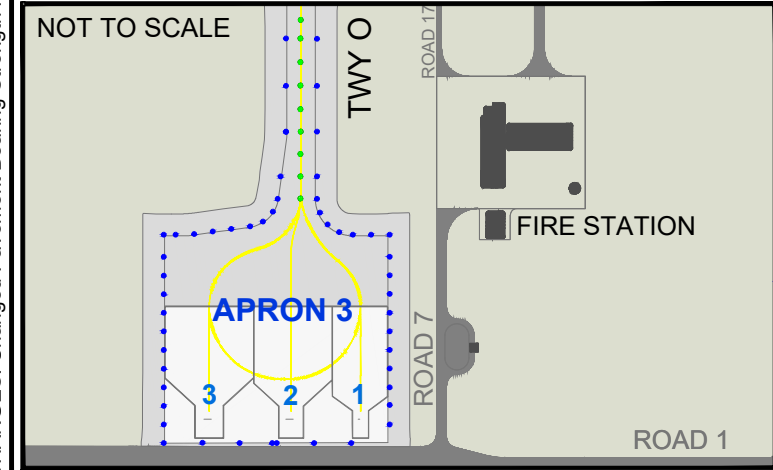

APRON 2		APRON 3	
STAND	COORDINATES	STAND	COORDINATES
4	241546.24N 0553657.54E	1	241608.87N 0553700.67E
5	241544.05N 0553656.05E	2	241607.07N 0553700.41E
6	241541.65N 0553656.39E	3	241604.94N 0553700.11E
7	241539.28N 0553656.54E		
8	241536.70N 0553656.15E		
9	241533.88N 0553655.74E		

ATS COMMUNICATION FACILITIES	
Services	Channel (MHz)
ATIS/ D-ATIS	126.050
	133.550 (PRI)
	132.675 (PRI)
APP	135.350 (SRY)
TWR	119.850
GMC	129.150 (ACFT) 118.950 (VEHICLES)
HEL	125.900

Remarks:
1) For Stop bars and ITHPs information refer to OMAL AD 2-26 chart.
2) For RWY Physical Characteristics information refer to OMAL AD 2-21 chart.

LEGEND	
SYMBOL	DESCRIPTION
	HELIPAD
	RWY HOLDING POSITION PATTERN-A
	RUNWAY STRIP
	AIRSIDE SECURITY FENCE
	TAXIWAY
	AIRSIDE SERVICE ROAD
	RUNWAY VISUAL RANGE (RVR)
	WIND DIRECTION INDICATOR
	TAXIWAY CLOSED
	SERVICE VEHICLE STOP MARKING

VAR 2°E (2017)

ALTITUDES & ELEVATIONS IN FEET
DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC