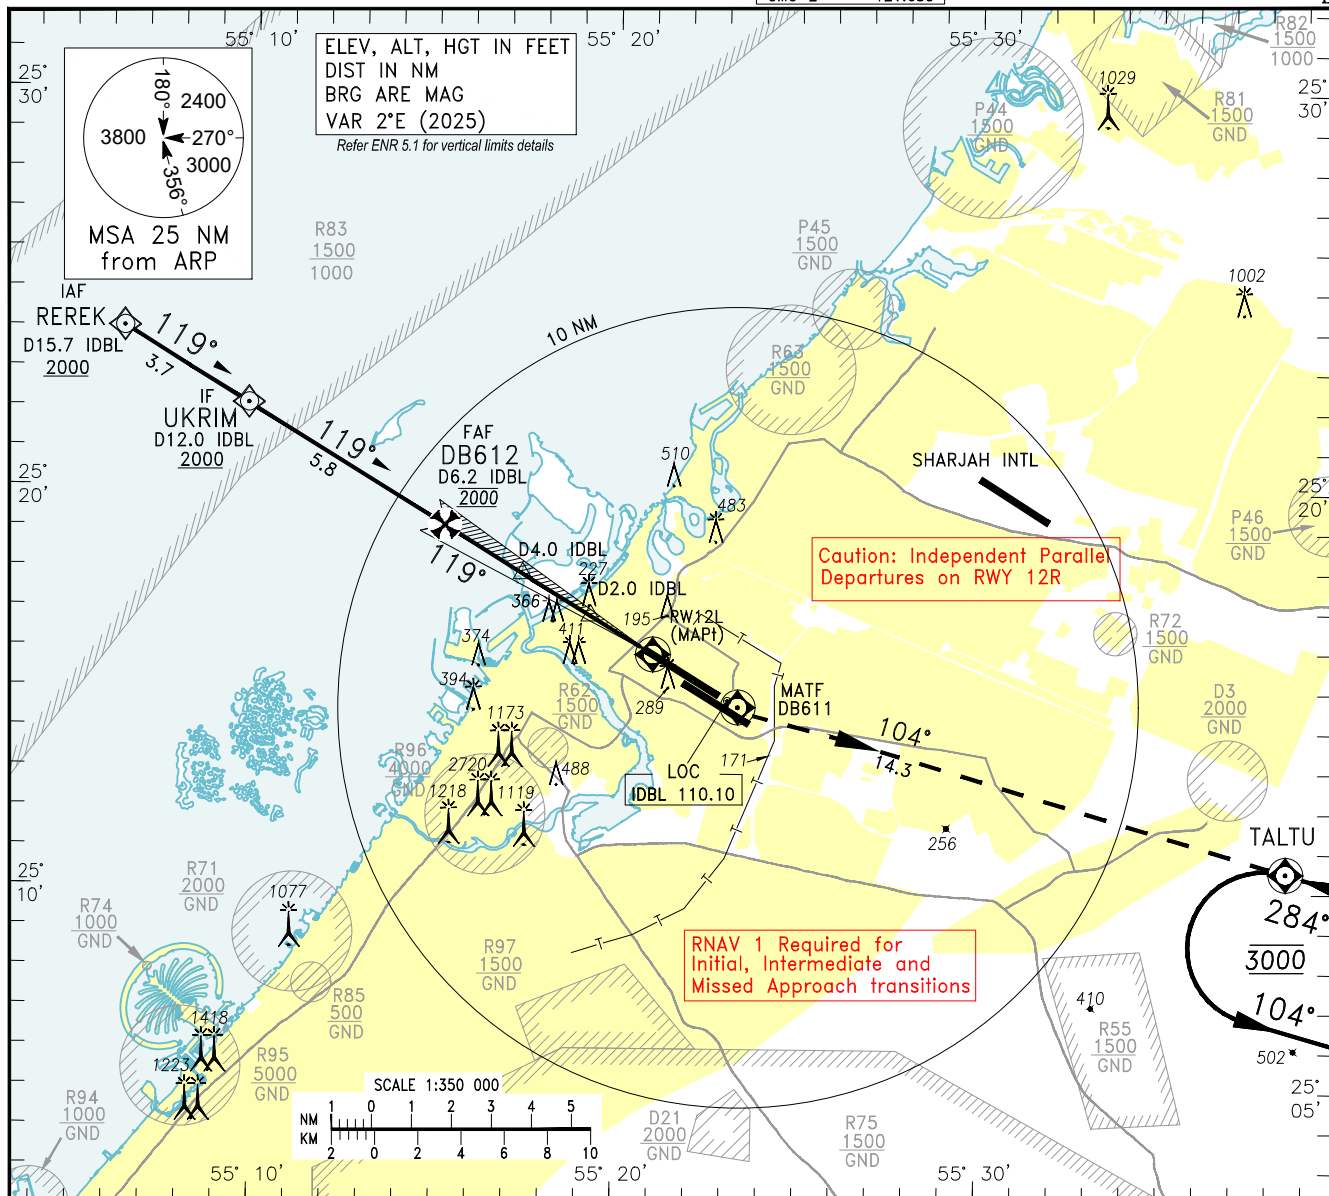
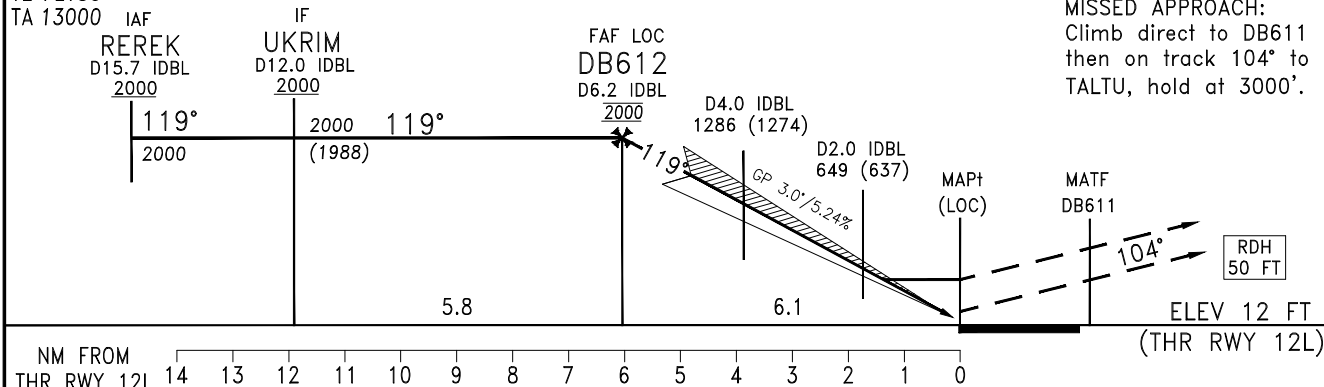


INSTRUMENT
APPROACH
CHART-ICAOAD ELEV 62 FT
HEIGHTS RELATED TO
THR RWY 12L ELEV 12 FT

D-ATIS (ARR)	126.275
ARR	124.900
DIR	127.900
TWR (N)	118.750
TWR (S)	119.550
GMC-1	118.350
GMC-2	121.650

DUBAI / INTL
ILS RWY 12L
CAT A - D_LTL FL150
TA 13000

OCA/H		A	B	C	D	D _L				
Straight-in Approach	ILS CAT I ① MACG 3.00%	192(180)	204(192)	212(200)	223(211)	223(211)				
	ILS CAT II ② MACG 3.00%	104(92)	121(109)	133(121)	147(135)	147(135)				
	LOC MACG 2.65%	480(468)								
Circling		N/A								
ILS CAT III available. MNM RVR 50 M		Distance from IDBL		NM	6.2	5.2	4.2	3.2	2.2	1.2
① Minimum DH CAT I A,B – 200 FT		Altitude		FT	1970	1650	1330	1020	710	400
② Minimum DH CAT II A – 100 FT		Ground Speed		KT	80	100	120	140	160	180
		Rate of Descent		FT/MIN	430	540	650	760	870	980

CHANGES: Amended GP INOP to LOC.