AERODROME CHART - ICAO

ARP	AD ELEV 171 FT
245506N 0551032E	

DUBAI / AL MAKTOUM INTL.
UNITED ARAB EMIRATES

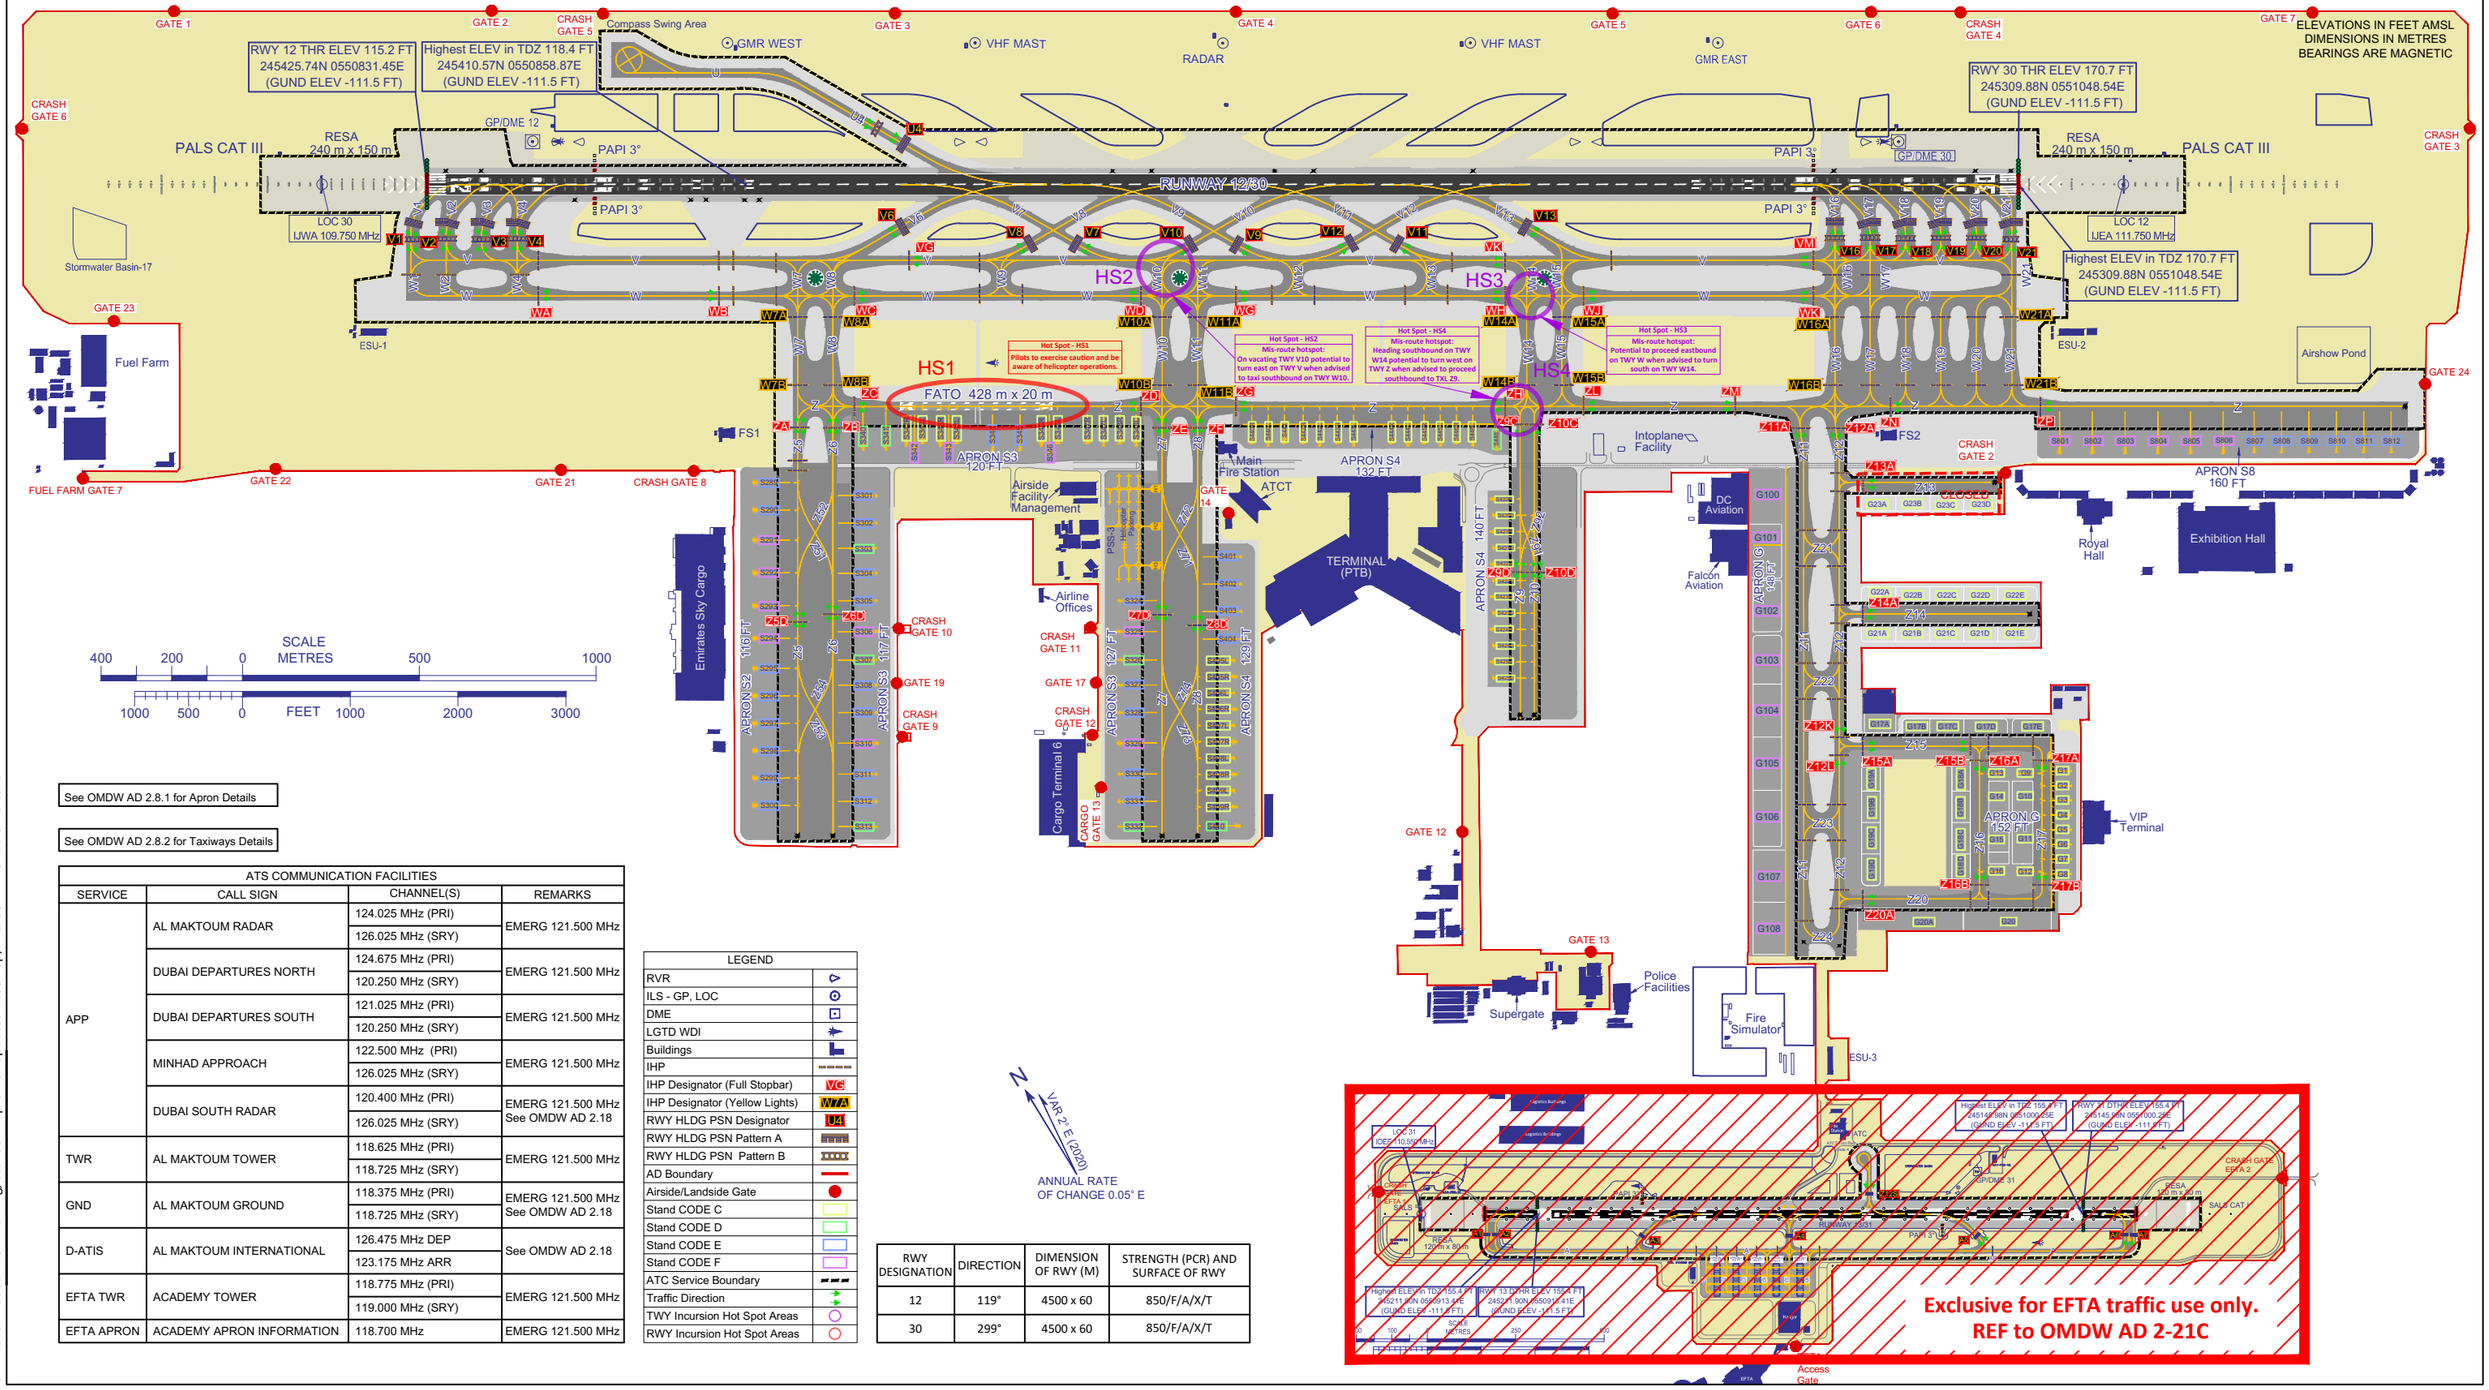

See OMDW AD 2.8.1 for Apron Details

See OMDW AD 2.8.2 for Taxiways Details

ATS COMMUNICATION FACILITIES			
SERVICE	CALL SIGN	CHANNEL(S)	REMARKS
APP	AL MAKTOUM RADAR	124.025 MHz (PRI) 126.025 MHz (SRY)	EMERG 121.500 MHz
	DUBAI DEPARTURES NORTH	124.675 MHz (PRI) 120.250 MHz (SRY)	EMERG 121.500 MHz
	DUBAI DEPARTURES SOUTH	121.025 MHz (PRI) 120.250 MHz (SRY)	EMERG 121.500 MHz
	MINHAD APPROACH	122.500 MHz (PRI) 126.025 MHz (SRY)	EMERG 121.500 MHz
	DUBAI SOUTH RADAR	120.400 MHz (PRI) 126.025 MHz (SRY)	EMERG 121.500 MHz See OMDW AD 2.18
TWR	AL MAKTOUM TOWER	118.625 MHz (PRI) 118.725 MHz (SRY)	EMERG 121.500 MHz
GND	AL MAKTOUM GROUND	118.375 MHz (PRI) 118.725 MHz (SRY)	EMERG 121.500 MHz See OMDW AD 2.18
D-ATIS	AL MAKTOUM INTERNATIONAL	126.475 MHz DEP 123.175 MHz ARR	See OMDW AD 2.18
EFTA TWR	ACADEMY TOWER	118.775 MHz (PRI) 119.000 MHz (SRY)	EMERG 121.500 MHz
EFTA APRON	ACADEMY APRON INFORMATION	118.700 MHz	EMERG 121.500 MHz

LEGEND
RVR
ILS - GP, LOC
DME
LGTD WDI
Buildings
IHP
IHP Designator (Full Stopbar)
IHP Designator (Yellow Lights)
RWY HLDG PSN Designator
RWY HLDG PSN Pattern A
RWY HLDG PSN Pattern B
AD Boundary
Airside/Landside Gate
Stand CODE C
Stand CODE D
Stand CODE E
Stand CODE F
ATC Service Boundary
Traffic Direction
TWY Incursion Hot Spot Areas
RWY Incursion Hot Spot Areas

RWY DESIGNATION	DIRECTION	DIMENSION OF RWY (M)	STRENGTH (PCR) AND SURFACE OF RWY
12	119°	4500 x 60	850/F/A/X/T
30	299°	4500 x 60	850/F/A/X/T

CHANGES: Added TLOF Marking, Stands in Apron G. Updated Basemap, ATS COM FAC Table. Editorial.