
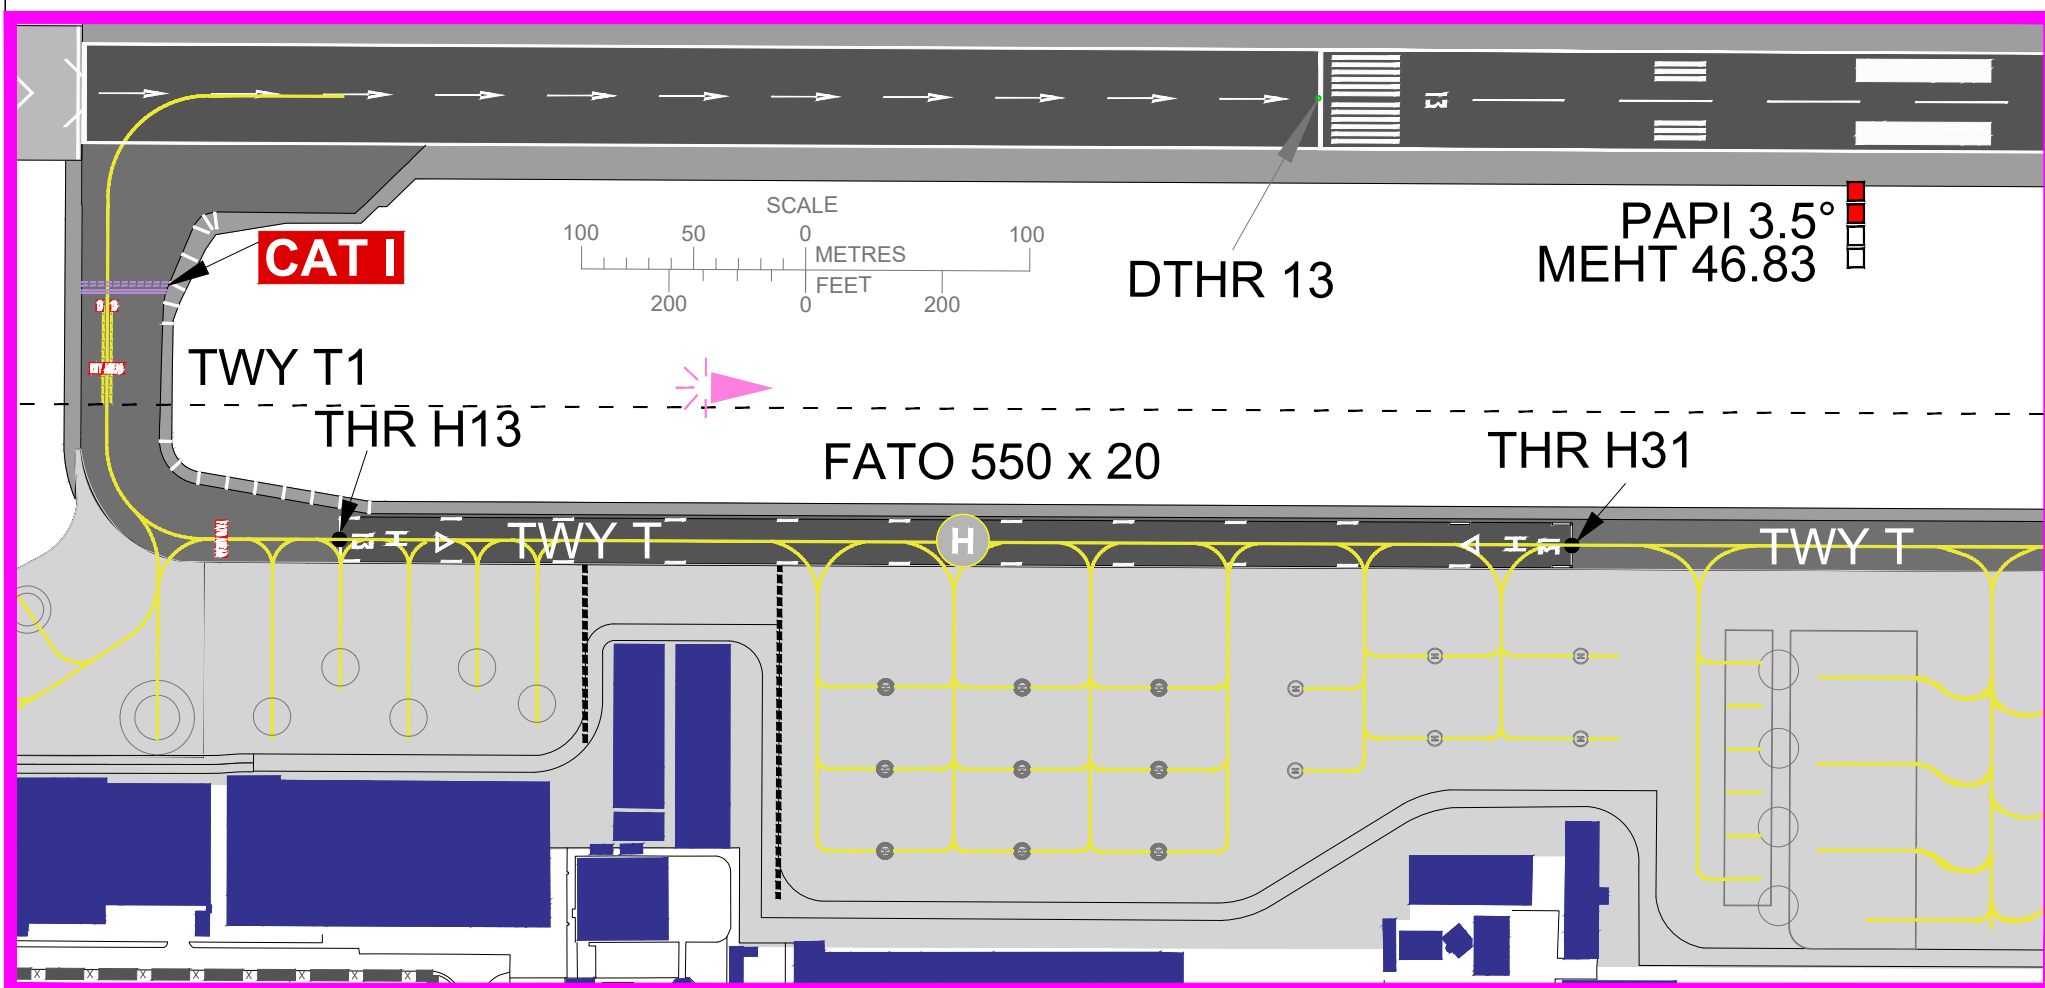


FATO	BRG (TRUE)	VAR	ELEV (M / FT)	THR COORD	TLOF COORD	SURFACE STRENGTH	DECLARED DISTANCES			GUND	TWY
							TODAH	RTODAH	LDAH		
THR H13	128°	2° E (2017)	3.14 / 10	242607.05N 0542643.06E	NIL	Asphalt PCR 380/F/A/X/U	550	550	550	-110	TWY TANGO WIDTH = 23 M
THR H31	308°		4.33 / 14	242556.05N 0542658.45E			550	550	550	-110	ASPHALT, PCR 380/F/A/X/U

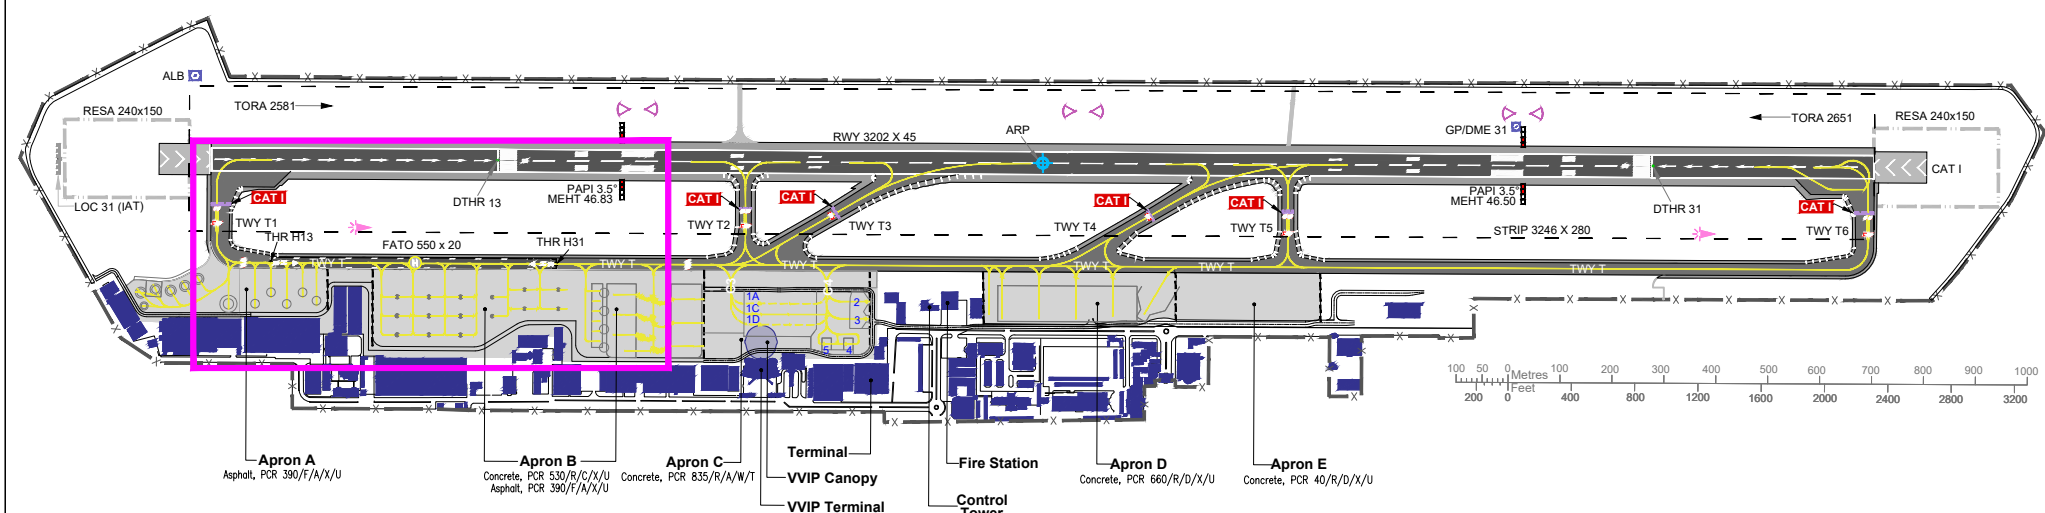

NOT TO SCALE

Note: For ATS Communication Facilities refer to OMAD AD 2.18.

Diagram illustrating the relationship between the annual rate of change and the variance of the rate of change:

- A line labeled "ANNUAL RATE OF CHANGE 0.05°E" is shown.
- A line labeled "VAR 2.0°E (2017)" is shown, representing the variance of the rate of change.