
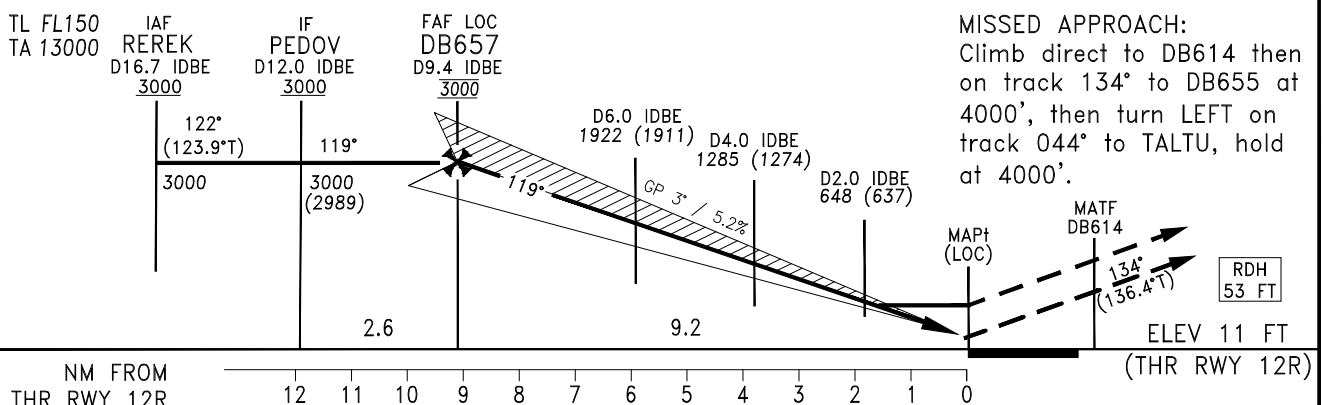


INSTRUMENT APPROACH CHART-ICAO
AD ELEV 62 FT
HEIGHTS RELATED TO THR RWY 12R ELEV 11 FT

D-ATIS (ARR)	126.275
ARR	124.900
DIR	127.900
TWR (N)	118.750
TWR (S)	119.550
GMC-1	118.350
GMC-2	121.650

DUBAI / INTL
ILS RWY 12R
CAT A-D_L

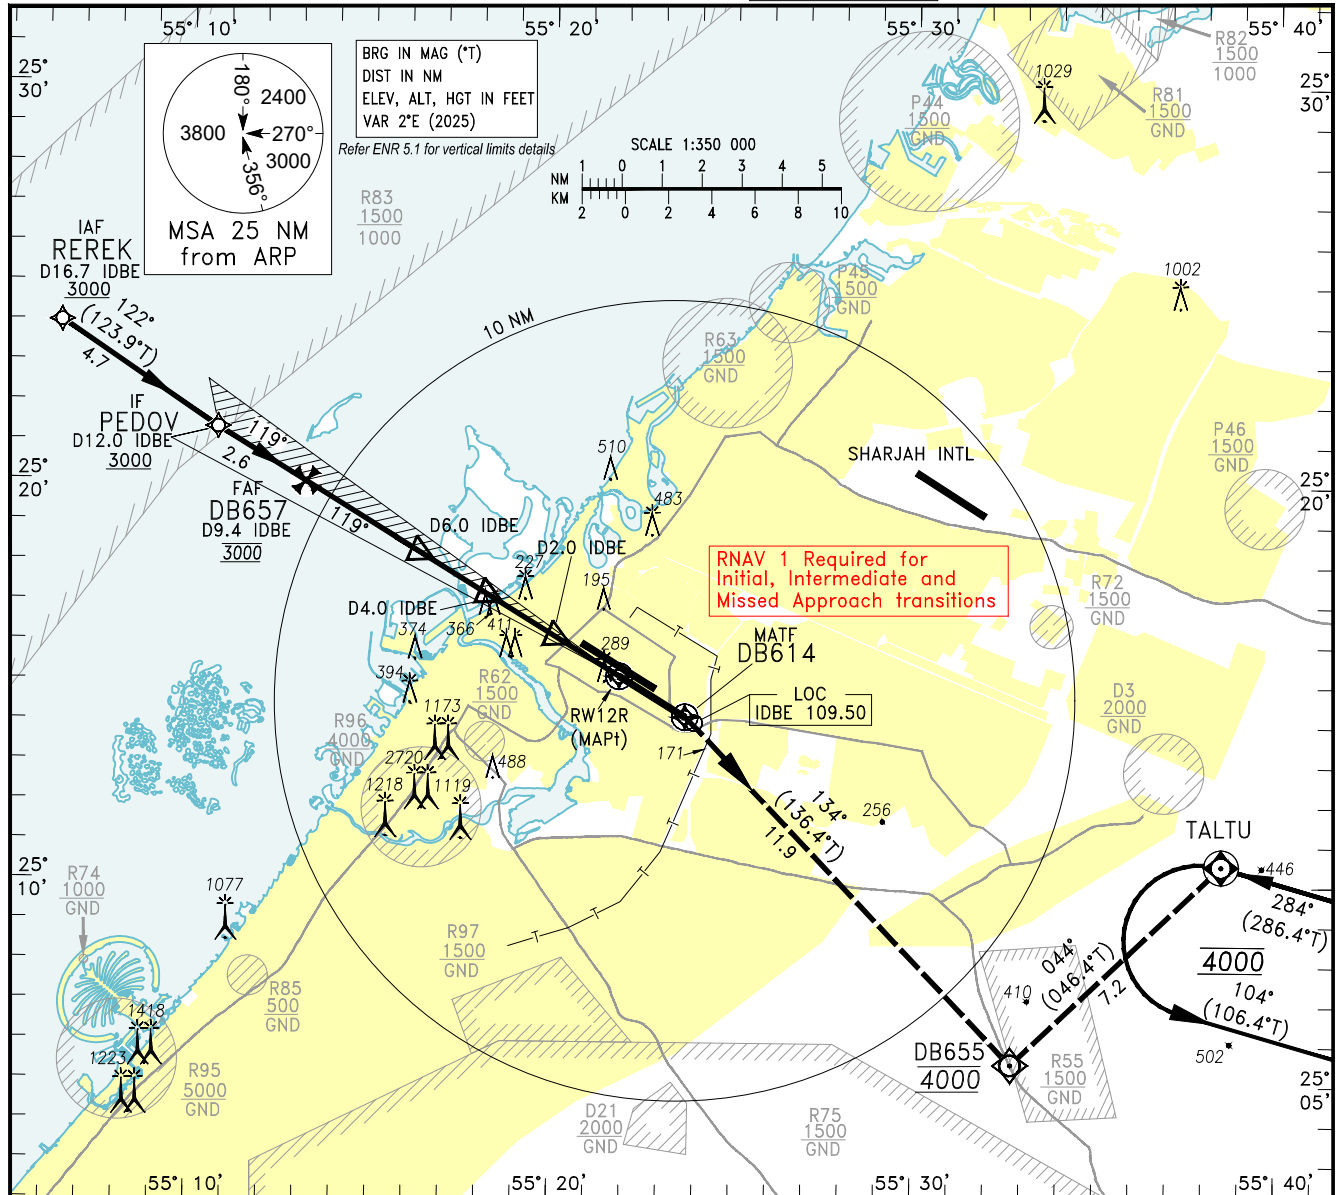

OCA/H		A		B		C		D		D _L			
Straight-in Approach	ILS CAT I ① MACG 5.00%	166(155)	178(167)	186(175)	197(186)	197(186)							
	ILS CAT II ② MACG 5.00%	78(67)	95(84)	107(96)	121(110)	121(110)							
	LOC MACG 4.30%	620(609)											
Circling		N/A											
ILS CAT III available, MNM RVR 50 M			Distance from IDBE		NM	6.1	5.1	4.1	3.1	2.1	1.1		
① Minimum DH CAT I A,B,C,D,D _L - 200 FT			Altitude		FT	1940	1620	1300	990	680	370		
② Minimum DH CAT II A,B,C - 100 FT			Ground Speed		KT	80	100	120	140	160	180		
			Rate of Descent		FT/MIN	430	540	650	760	870	980		