


STANDARD DEPARTURE CHART – AD ELEV 865 FT
INSTRUMENT (SID) – ICAO


AL AIN / INTL
RNAV 1 RWY 19
GIDIS 1J, LABRI 2J, MURGU 1J, RETAS 2J, ROVOS 1J

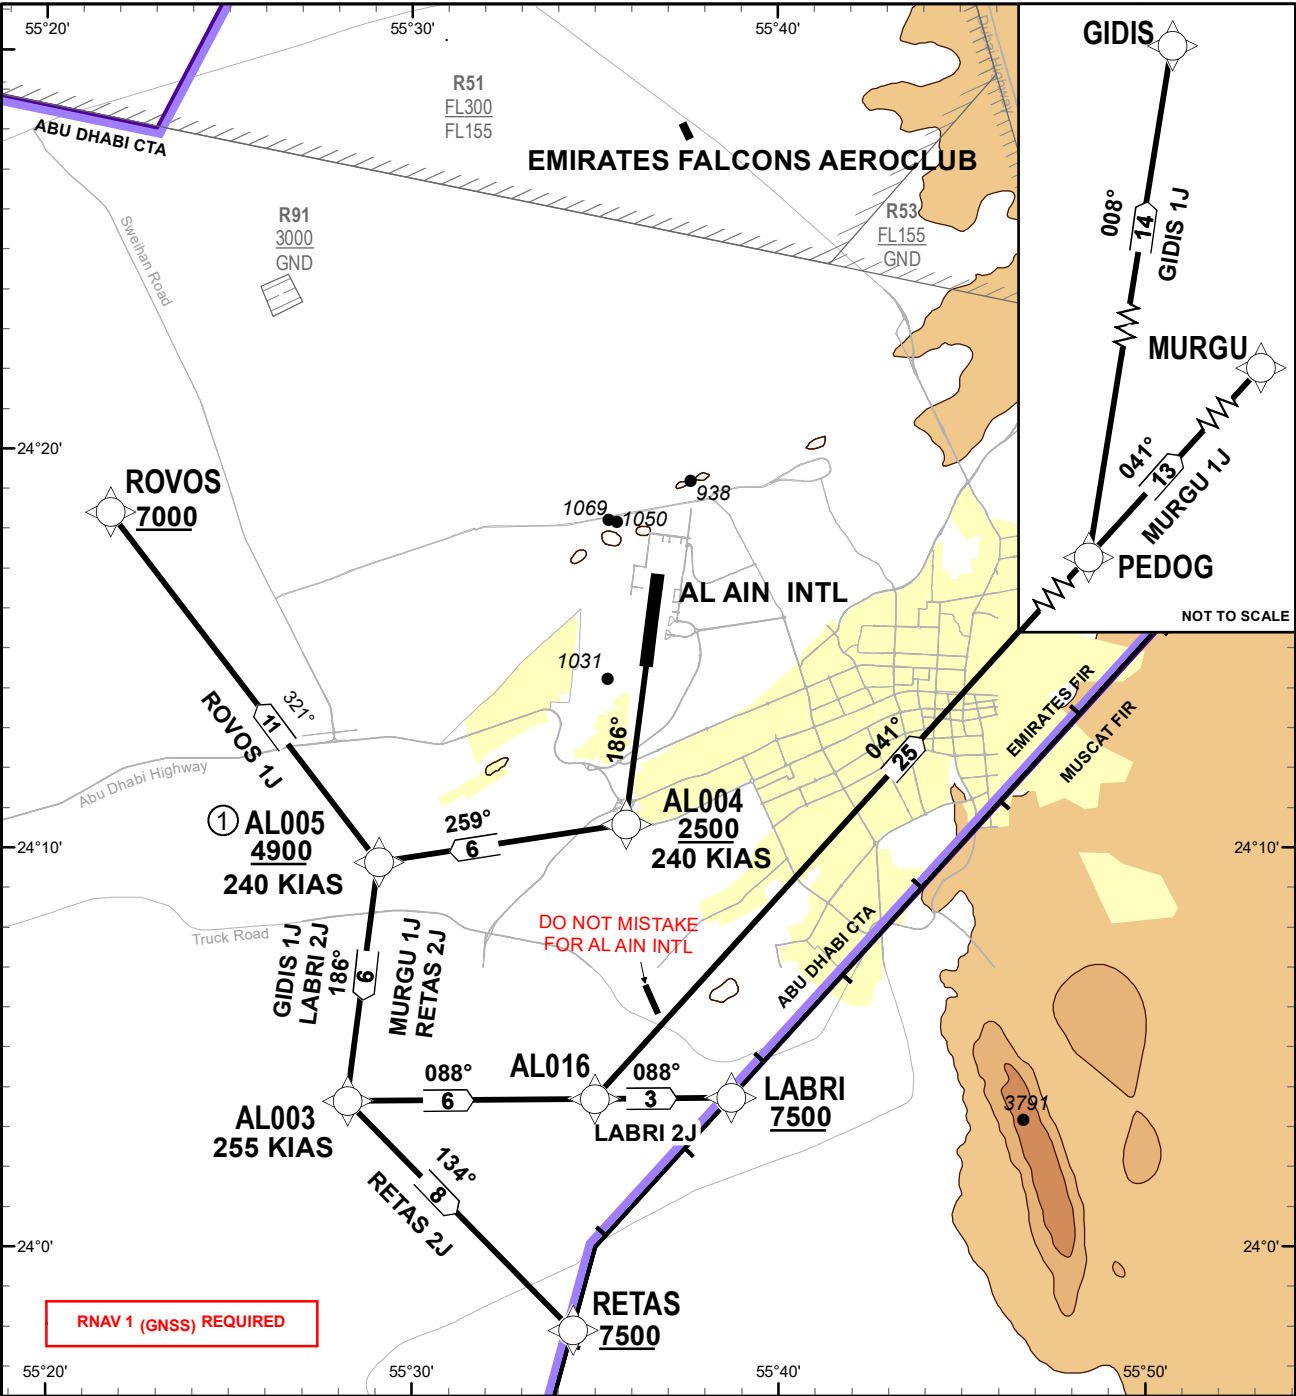

ATIS/D-ATIS	126.050
APP	133.550(PRI)
	132.675(PRI)
TWR	135.350(SRY)
	119.850
GMC	129.150(ACFT)
	118.950(VEHICLES)

FOR ROUTE DESCRIPTION
SEE OMAL AD 2.22


TRANSITION ALTITUDE
13000 FT




RESTRICTIONS
On DEP climb to 3000 FT only. Further climb when instructed by ABU DHABI RADAR EAST.
MNM required climb gradient 7% to 3,000 FT (425 FT per NM) due to airspace restriction
MAX 250 KIAS below 10,000 FT
DEP ACFT shall CTC ABU DHABI RADAR EAST as soon as possible APSS 2000 FT unless otherwise instructed by AL AIN TWR.

NOTES

Do not climb above ATC cleared level.



DIST IN NM
BEARINGS ARE MAGNETIC
ELEV, ALT, HGT IN FEET
INDICATED SPEEDS ARE MAXIMUM
Refer ENR 5.1 for vertical limits details



① MAX 240 KIAS NOT VALID FOR ROVOS 1J